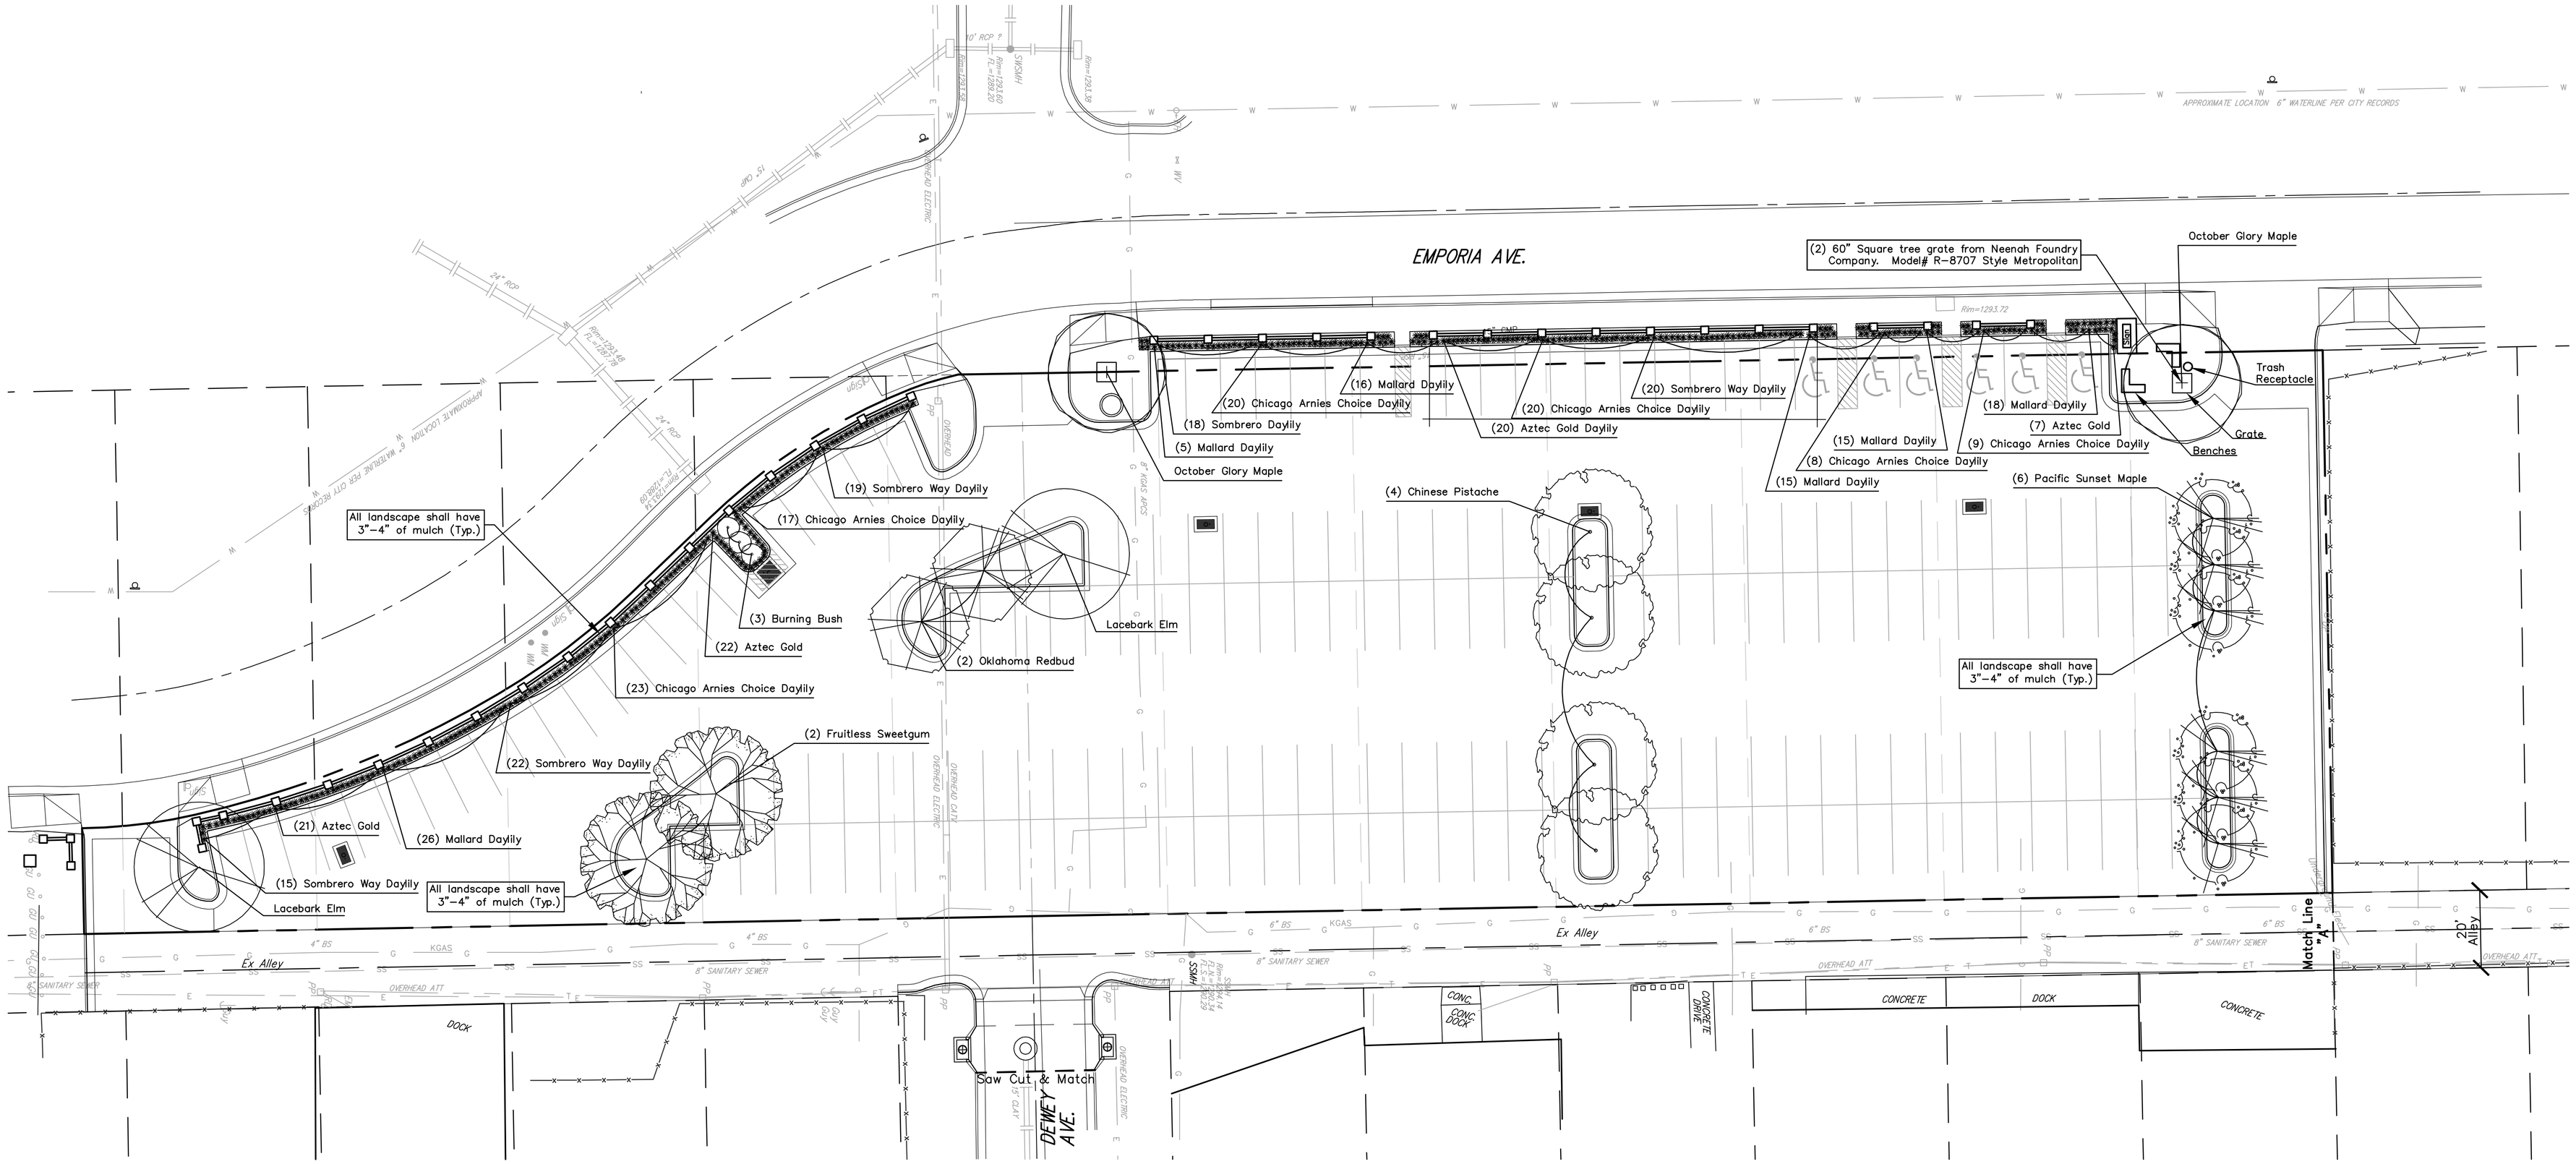

Landscape Plan
Scale 1"= 20'-0"

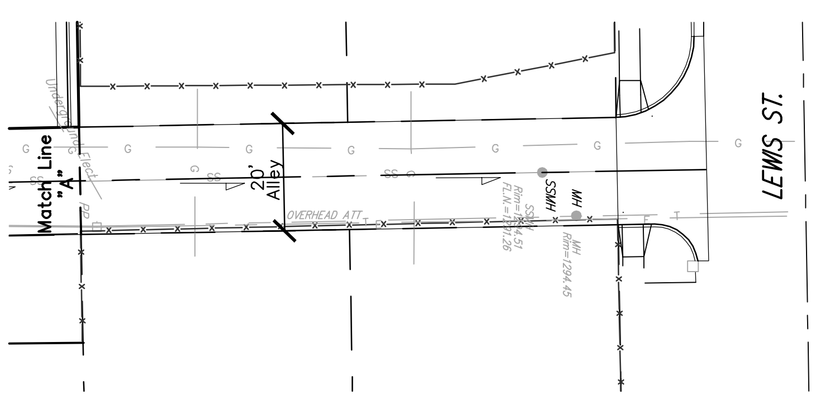

Alley Improvement North
Scale 1"= 20'-0"

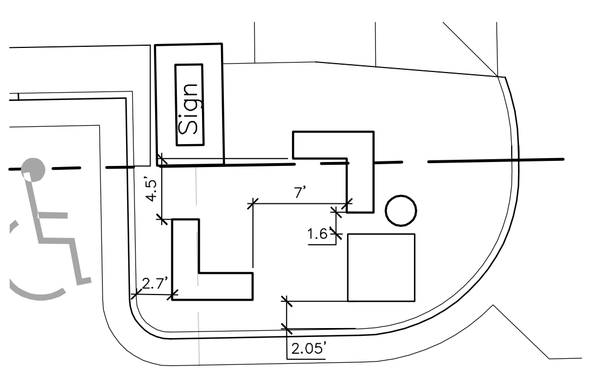

Seating Area Detail
Scale 1/8"= 1'-0"

Note:
Topsoil in the Landscaped Islands shall be friable, dark, and loamy in nature, and free of gravel and/or rock material. New soil shall also be free of organic material, and shall be capable of sustaining plant growth. Contractor shall be responsible for evaluating existing soil conditions prior to bidding, as onsite soils may not be suitable for required Top Soil applications. New soil shall be inspected and approved by the Engineer or his designated representative prior to installation.

Plant List

Quantity	SCIENTIFIC	COMMON	SIZE	METHOD	NOTE
2	Acer rubrum 'October Glory'	October Glory Maple	3" Cal	B&B	Full & Healthy
6	Acer truncatum x A. platanoides 'Warrenred'	Pacific Sunset Maple	3" Cal	B&B	Full & Healthy
2	Cercis reniformis 'Oklahoma'	Oklahoma Redbud	3" Cal	B&B	Full & Healthy
3	Euonymus alata 'Compactus'	Burning Bush	5 Gal	Container	Full & Healthy
70	Hemerocallis 'Aztec Gold'	Aztec Gold Daylily	1 Gal	Container	Color – Gold
98	Hemerocallis 'Chicago Arnies Choice'	Chicago Arnies Choice Daylily	1 Gal	Container	Color – Lavender
91	Hemerocallis 'Mallard'	Mallard Daylily	1 Gal	Container	Color – Scarlet Red
102	Hemerocallis 'Sombrero Way'	Sombrero Way Daylily	1 Gal	Container	Color – Orange
2	Liquidambar styraciflua 'Rotundiloba'	Furitless Sweetgum	3" Cal	B&B	Full & Healthy
4	Pistacia chinensis	Chinese Pistache	3" Cal	B&B	Full & Healthy
2	Ulmas parvifolia	Lacebark Elm	3" Cal	B&B	Full & Healthy

20 0 20

Drawing File: E:\eng\Intrust Bank Arena Parking Lots\Emporia Street Parking Lot\dwg\EP Site Plan.dwg

July, 2009

Design: BKB
Drawn: BKB
Approved: PJM/JB
Scale: 1" 20'

Project No. 09-03-E273

CITY OF WICHITA

Landscape Plan
Emporia Parking Lot

Baughman Company , P.A.
315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

SHEET 7 OF 31