SHEET NO.	TOTAL SHEETS
27	33

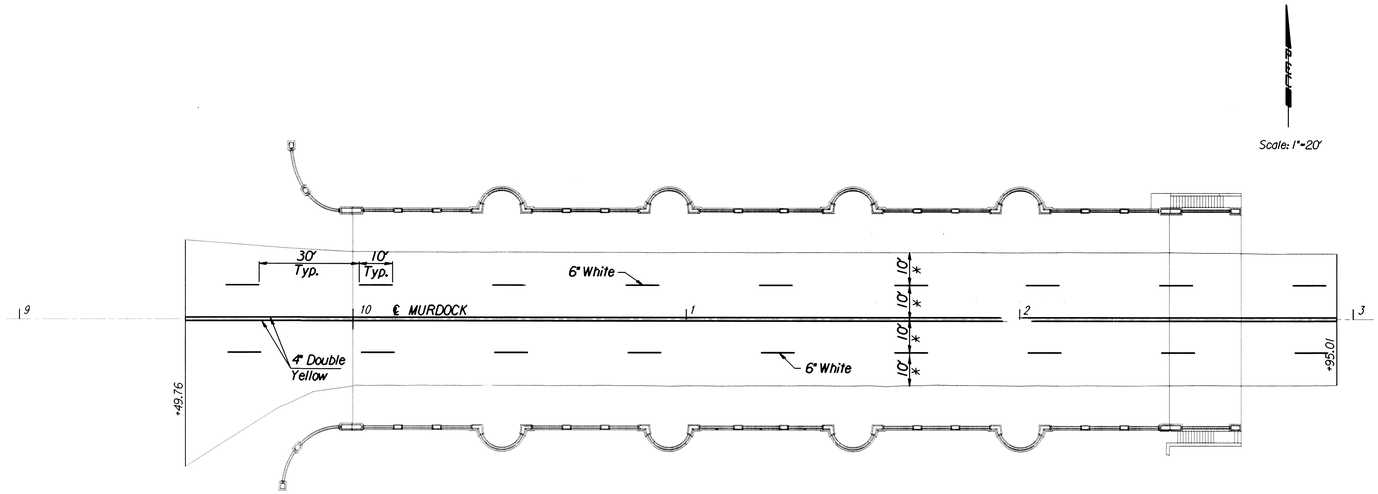

* Dimensions are to ℄ marking

PLAN

SUMMARY OF PAVEMENT MARKINGS (COLD PLASTIC)(CLASS A OR B)

DOUGLAS AVENUE	OFFSET	LEFT TURN ARROW	4" SOLID YELLOW DOUBLE LINE	12" SOLID YELLOW DIAGONAL LINE	6" BROKEN WHITE LANE LINE	6" SOLID WHITE LANE LINE	12" SOLID TYPE I CROSSWALK LINE	24" SOLID TYPE I STOP LINE
9+49 to 12+95	10' Lt.				346'			
9+49 to 12+95	℄		346'					
9+49 to 12+95	10' Rt.				346'			
TOTAL			346'		692'			

Note: Pavement Markings shall conform to the requirements of the KDOT Std. Specifications for Cold Plastic Pavement Marking (Class A or Class B).

Pavement Marking is paid for as Lump Sum.

Note: Words and symbols shall conform to the latest Edition of "Standard Alphabets for Highway Signs and Pavement Markings" Printed by the U.S. Department of Transportation, Federal Highway Administration.

No.	Revisions	By	Date

CITY OF WICHITA, KANSAS
MICHAEL E. LINDEBAK, P.E.-CITY ENGINEER
MURDOCK BRIDGE
OVER LITTLE ARKANSAS RIVER
PAVEMENT MARKING PLAN
CITY OF WICHITA PROJECT NO. 472-82785

PROFESSIONAL ENGINEERING CONSULTANTS, P.A.
ENGINEERS
WICHITA, KANSAS

Designed by	RAS	Checked by	RAS	
Drawn by	RAS	Date	Oct. 1998	Job No. 96940

i:\996\96940\markingdgn
drawn by : ras
plotted by: ras 10-13-98