PLOTTED: Monday, August 08, 2022 @ 11:28AM

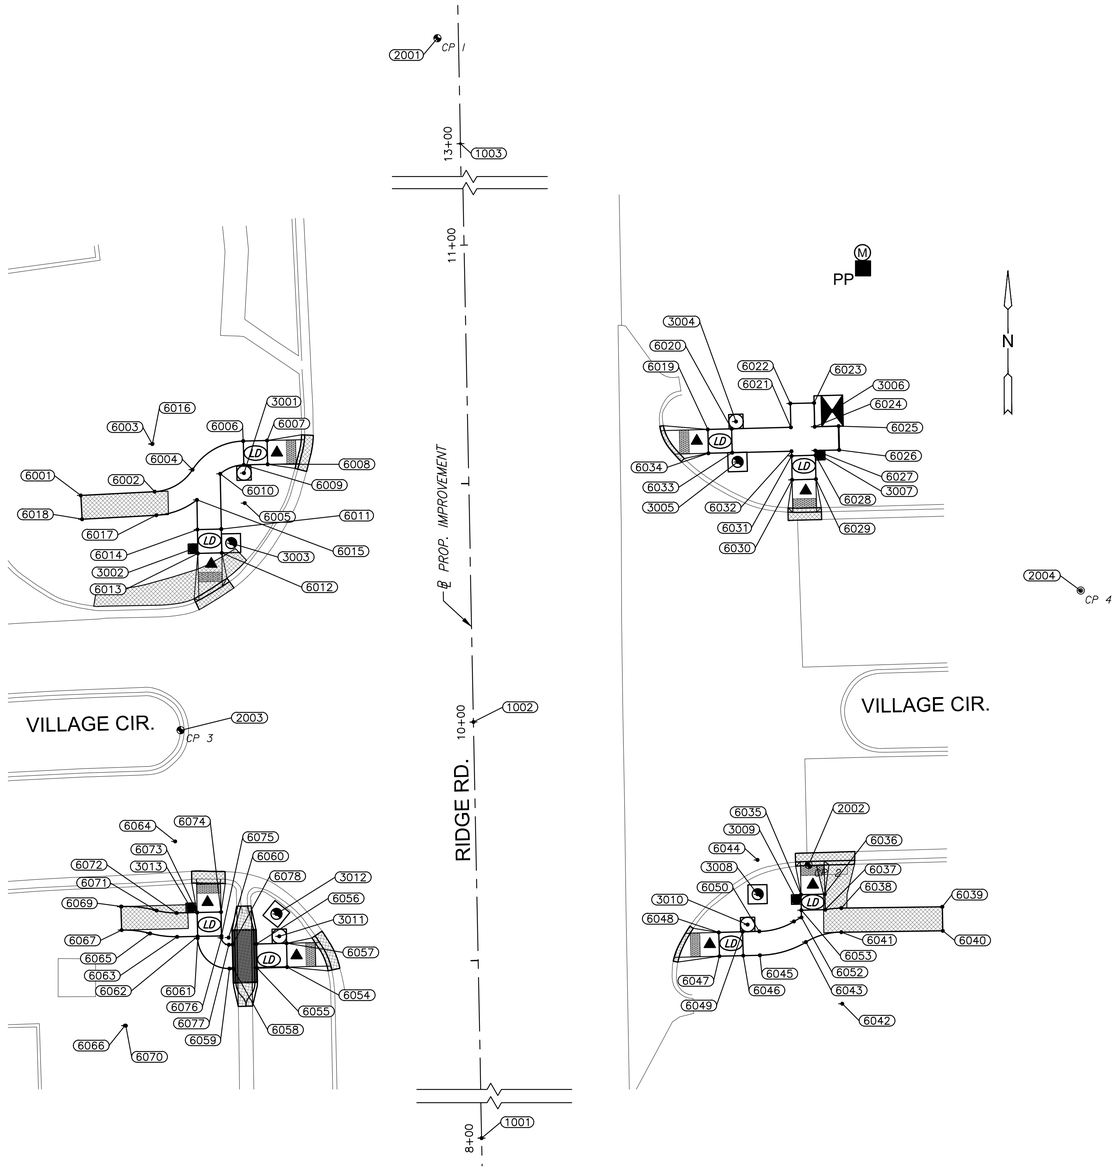

SIDEWALK POINTS					
POINT #	STATION	OFFSET/SIDE	NORTHING	EASTING	DESC.
6001	10+49.10	81.35, Lt.	1711595.054	1622818.255	MATCH EX.
6002	10+49.58	65.85, Lt.	1711595.844	1622833.742	PC
6003	10+59.58	66.16, Lt.	1711605.831	1622833.233	RADIUS PT.
6004	10+54.04	57.84, Lt.	1711600.452	1622841.663	PRC
6005	10+46.83	47.02, Lt.	1711593.460	1622852.623	RADIUS PT.
6006	10+59.83	47.09, Lt.	1711606.456	1622852.296	PT
6007	10+59.86	42.09, Lt.	1711606.581	1622857.294	BEGIN RAMP
6008	10+54.86	42.06, Lt.	1711601.583	1622857.420	BEGIN RAMP
6009	10+54.83	47.06, Lt.	1711601.457	1622852.422	PC
6010	10+53.05	52.04, Lt.	1711599.584	1622847.475	PT
6011	10+41.48	52.04, Lt.	1711588.015	1622847.703	LANDING
6012	10+36.48	52.04, Lt.	1711583.016	1622847.801	SIDEWALK RAMP
6013	10+36.48	57.04, Lt.	1711582.918	1622842.802	SIDEWALK RAMP
6014	10+41.48	57.04, Lt.	1711587.917	1622842.704	LANDING
6015	10+47.70	57.04, Lt.	1711594.130	1622842.582	PC
6016	10+59.64	66.12, Lt.	1711605.890	1622833.271	RADIUS PT.
6017	10+44.65	65.61, Lt.	1711590.912	1622834.074	PT
6018	10+44.12	81.18, Lt.	1711590.078	1622818.522	MATCH EX.
6019	10+60.36	50.32, Rt.	1711608.903	1622949.676	SIDEWALK RAMP
6020	10+60.39	55.32, Rt.	1711609.029	1622954.674	LANDING
6021	10+60.46	67.74, Rt.	1711609.341	1622967.089	PI
6022	10+65.46	67.71, Rt.	1711614.339	1622966.963	PI
6023	10+65.49	72.71, Rt.	1711614.465	1622971.962	PI
6024	10+60.49	72.74, Rt.	1711609.466	1622972.087	PI
6025	10+60.52	77.74, Rt.	1711609.595	1622977.086	PI
6026	10+55.52	77.77, Rt.	1711604.597	1622977.215	PI
6027	10+55.49	72.77, Rt.	1711604.468	1622972.216	PI
6028	10+54.51	72.77, Rt.	1711603.491	1622972.237	LANDING
6029	10+49.51	72.78, Rt.	1711598.491	1622972.344	SIDEWALK RAMP
6030	10+49.45	67.78, Rt.	1711598.336	1622967.346	SIDEWALK RAMP
6031	10+54.45	67.77, Rt.	1711603.335	1622967.240	LANDING
6032	10+55.46	67.77, Rt.	1711604.342	1622967.218	PI
6033	10+55.39	55.35, Rt.	1711604.030	1622954.800	LANDING
6034	10+55.36	50.35, Rt.	1711603.905	1622949.801	SIDEWALK RAMP
6035	9+62.46	67.93, Rt.	1711511.367	1622969.207	SIDEWALK RAMP
6036	9+62.47	72.93, Rt.	1711511.474	1622974.206	SIDEWALK RAMP
6037	9+59.20	72.94, Rt.	1711508.206	1622974.276	LANDING
6038	9+59.47	76.32, Rt.	1711508.540	1622977.654	PI
6039	9+59.34	97.50, Rt.	1711508.828	1622998.834	MATCH EX.
6040	9+54.30	97.50, Rt.	1711503.783	1622998.933	MATCH EX.

SIDEWALK POINTS					
POINT #	STATION	OFFSET/SIDE	NORTHING	EASTING	DESC.
6041	9+54.44	76.24, Rt.	1711503.505	1622977.670	PC
6042	9+39.44	76.14, Rt.	1711488.506	1622977.866	RADIUS PT.
6043	9+52.51	68.78, Rt.	1711501.429	1622970.251	PRC
6044	9+69.93	58.96, Rt.	1711518.660	1622960.096	RADIUS PT.
6045	9+49.93	59.07, Rt.	1711498.666	1622960.599	PT
6046	9+49.91	55.58, Rt.	1711498.578	1622957.105	LANDING
6047	9+49.89	50.58, Rt.	1711498.452	1622952.107	SIDEWALK RAMP
6048	9+54.89	50.55, Rt.	1711503.451	1622951.981	SIDEWALK RAMP
6049	9+54.91	55.55, Rt.	1711503.577	1622956.980	LANDING
6050	9+54.93	59.05, Rt.	1711503.664	1622960.473	PC
6051	9+56.88	66.35, Rt.	1711505.752	1622967.738	PT
6052	9+57.68	67.94, Rt.	1711506.590	1622969.309	PI
6053	9+59.19	67.94, Rt.	1711508.099	1622969.277	LANDING
6054	9+49.39	40.04, Lt.	1711496.176	1622861.512	SIDEWALK RAMP
6055	9+49.35	46.38, Lt.	1711496.016	1622855.174	LANDING
6056	9+54.35	46.41, Lt.	1711501.015	1622855.048	LANDING
6057	9+54.39	40.07, Lt.	1711501.174	1622861.387	SIDEWALK RAMP
6058	9+49.33	51.38, Lt.	1711495.891	1622850.175	PI
6059	9+49.32	52.14, Lt.	1711495.872	1622849.415	PC
6060	9+55.82	52.18, Lt.	1711502.370	1622849.252	RADIUS PT.
6061	9+55.82	58.68, Lt.	1711502.242	1622842.753	PT
6062	9+56.20	58.68, Lt.	1711502.615	1622842.746	PI
6063	9+56.20	62.99, Lt.	1711502.533	1622838.431	PC
6064	9+76.20	62.99, Lt.	1711522.529	1622838.038	RADIUS PT.
6065	9+57.01	68.63, Lt.	1711503.233	1622832.780	PRC
6066	9+37.82	74.27, Lt.	1711483.936	1622827.521	RADIUS PT.
6067	9+57.82	74.59, Lt.	1711503.924	1622826.808	PT MATCH EX.
6068	9+62.76	74.63, Lt.	1711508.867	1622826.670	MATCH EX.
6069	9+62.76	74.52, Lt.	1711508.871	1622826.783	PC
6070	9+37.77	74.09, Lt.	1711483.888	1622827.701	RADIUS PT.
6071	9+61.79	67.15, Lt.	1711508.039	1622834.162	PRC
6072	9+61.20	62.99, Lt.	1711507.532	1622838.333	PT
6073	9+61.20	58.68, Lt.	1711507.617	1622842.647	LANDING
6074	9+61.20	53.68, Lt.	1711507.715	1622847.646	LANDING
6075	9+56.20	53.68, Lt.	1711502.716	1622847.745	LANDING
6076	9+55.82	53.68, Lt.	1711502.340	1622847.752	PC
6077	9+54.32	52.17, Lt.	1711500.870	1622849.289	PT
6078	9+54.33	51.41, Lt.	1711500.889	1622850.050	PI

BASELINE POINTS				
POINT #	STATION	NORTHING	EASTING	DESC.
1001	8+00.00	1711347.602	1622904.481	POT
1002	10+00.00	1711547.563	1622900.552	POT
1003	13+00.00	1711847.505	1622894.658	POT

BENCHMARK/CONTROL POINTS					
POINT #	STATION	OFFSET/SIDE	NORTHING	EASTING	DESC.
2001	13+29.52	5.89, Lt.	1711876.900	1622888.192	BM#1/CP#1
2002	9+68.66	69.65, Rt.	1711517.594	1622970.805	BM#2/CP#2
2003	9+99.45	61.42, Lt.	1711545.809	1622839.156	BM#3/CP#3
2004	9+91.61	248.19, Rt.	1711544.051	1623148.858	BM#4/CP#4

SIGNAL POINTS					
POINT #	STATION	OFFSET/SIDE	NORTHING	EASTING	DESC.
3001	10+53.12	47.07, Lt.	1711599.746	1622852.451	POLE #2
3002	10+37.48	58.04, Lt.	1711583.898	1622841.782	POLE #1
3003	10+38.48	50.04, Lt.	1711585.055	1622849.761	SERVICE BOX #1
3004	10+61.90	56.26, Rt.	1711610.561	1622955.584	POLE #3
3005	10+53.41	56.42, Rt.	1711602.070	1622955.912	SERVICE BOX #1
3006	10+63.76	76.47, Rt.	1711612.810	1622975.754	CONTROLLER
3007	10+54.49	73.77, Rt.	1711603.490	1622973.238	POLE #4
3008	9+62.73	58.83, Rt.	1711511.453	1622960.106	SERVICE BOX #3
3009	9+61.46	66.93, Rt.	1711510.346	1622968.229	POLE #5
3010	9+56.41	56.63, Rt.	1711505.095	1622958.029	POLE #6
3011	9+55.89	41.57, Lt.	1711502.644	1622859.857	POLE #7
3012	9+60.58	42.10, Lt.	1711507.326	1622859.236	SERVICE BOX #4
3013	9+62.20	60.00, Lt.	1711508.590	1622841.303	POLE #8

MKEC
Wichita, KS • 316-684-9600

PLANS FOR

RIDGE RD. & VILLAGE CIR. TRAFFIC SIGNAL

WICHITA, KS

©2022
MKEC Engineering
All Rights Reserved
www.mkec.com
These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

BUBBLE MAP

PROJECT NO.	472-2021-085741
DATE	8/8/2022
SCALE	NTS

DESIGNED	DRAWN	CHECKED
JRA	WNJ	JRA

NO.	REVISION	DATE

SHEET NO.

7 OF 31

Sh. No. 7

J:\PROJECTS\2019\2019010483_COV_RIDGE AND VILLAGE TRAFFIC SIGNAL_19483 CAD\SHTS\05 CIVIL\PAV\19483-05-5004.DWG