Survey H.R.R. ELS
Plan J. Wiener
Exc. J. Wiener
Checked

BM - 106.30 "□" in Globe W. End N. Curb @ W.L. Irving and Millwood.
Base Line = Centerline of Irving

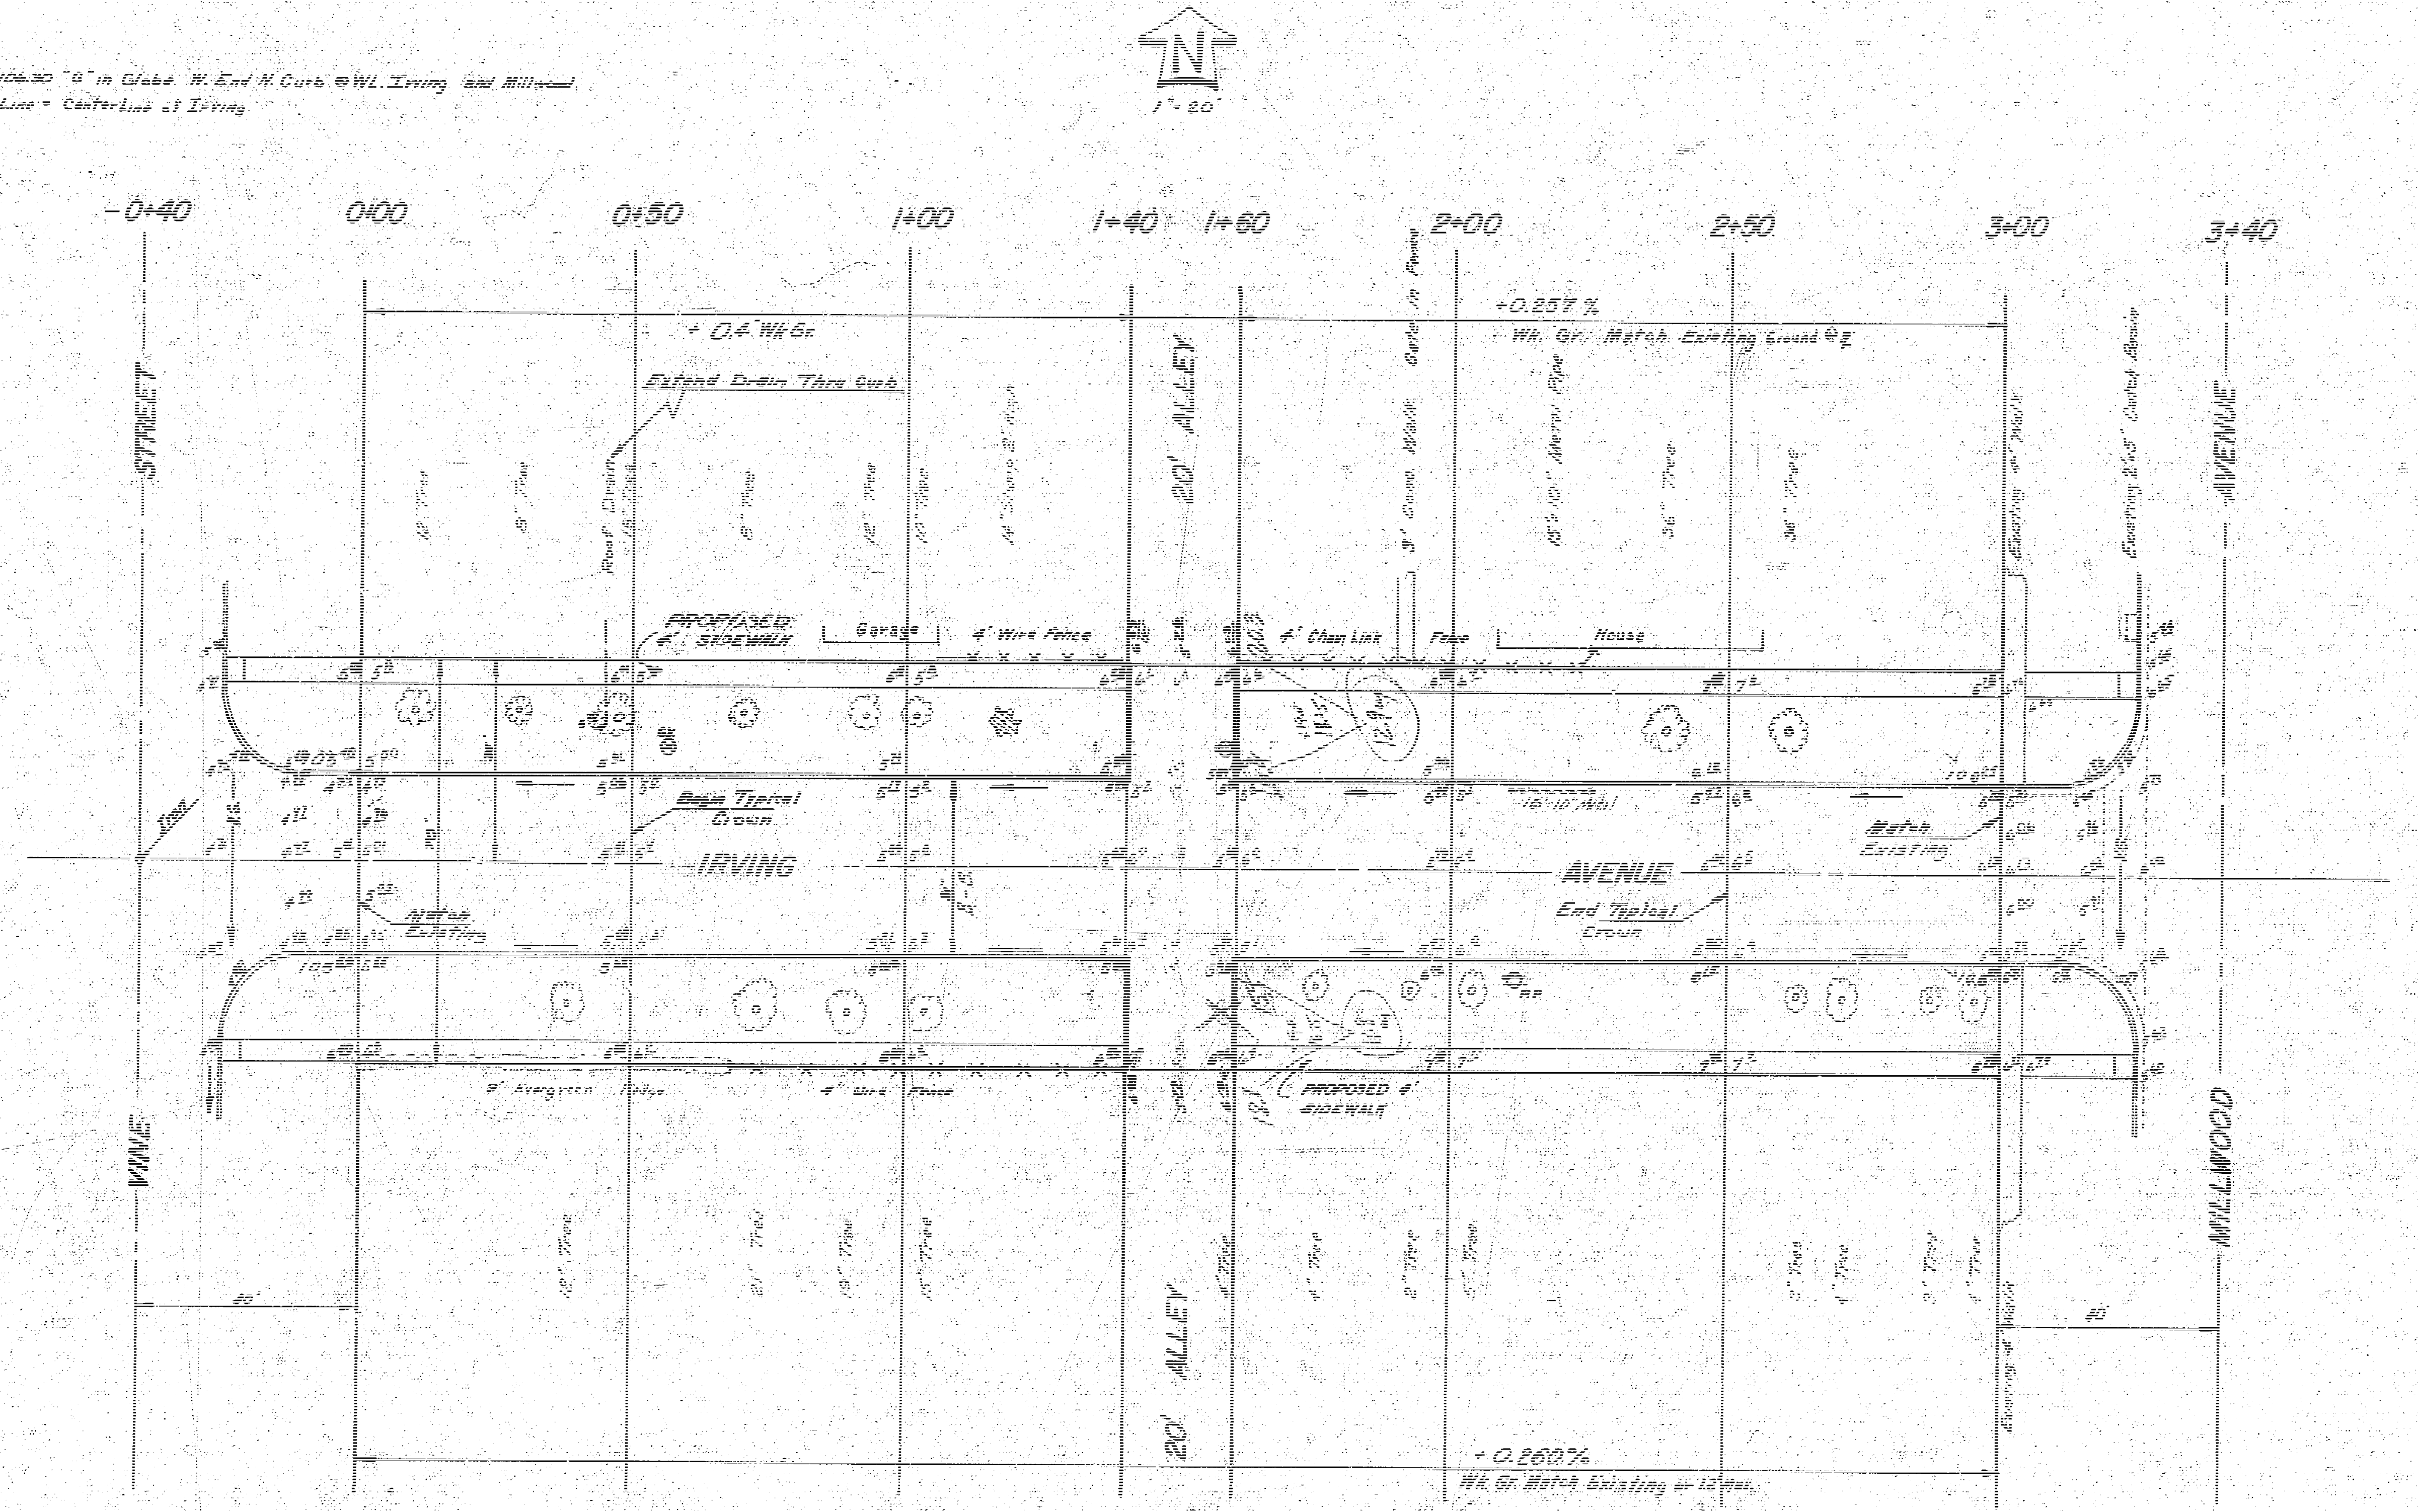
N
1" = 20'
-0+40
0+00
0+50
1+00
1+40
1+60
2+00
2+50
3+00
3+40
+ 0.4 Wk. Gr.
+ 0.257 %
Wk. Gr. Match Existing Ground @ ℄
Extend Drain Thru Curb
Roof Drain
PROPOSED 4' SIDEWALK
Garage
4' Wire Fence
4' Chain Link Fence
House
3' Conc. Walk
Existing 4' Walk
Existing 2'x5' Catch Basin
VINE STREET
20' ALLEY
MILLWOOD AVENUE
IRVING AVENUE
Begin Typical Crown
End Typical Crown
Match Existing
PROPOSED 4' SIDEWALK
4' Evergreen Hedge
4' Wire Fence
Existing 4' Walk
+ 0.260 %
Wk. Gr. Match Existing or 12 Max.
40'

• SIDEWALK •
Grade parking and clear Right of Way for proposed sidewalk. Sidewalk to be Constructed by "Others".

EARTHWORK

PROPERTY	"EXCAVATION"	CITY
225.7 Cu. Yds.		41.1 Cu. Yds.
+10% 22.6 " "		+10% 4.1 " "
248.3 Cu. Yds.		45.2 Cu. Yds.

170± Cu. Yds. Comp. Fill S.G.M.

30± Cu. Yds. Comp. Fill S.G.M.

JAMES H. TANDY 2012

B.E. SMITH 406

IRVING AVENUE
E.L. VINE to W.L. MILLWOOD
30' CONC. and CURB
CITY of WICHITA, KANSAS
B.E. SMITH CITY ENGINEER
DATE May 1969 PROJ. NO. C18-108