B.M. 150.93 N.E. corner concrete porch House # 7511 W. 11th Street.


B.M. 149.18 "O" cut top west curb Dunsworth & S.L. Ponderosa.

N

Scale: 1"=20'

NOTE:
Depress curb through driveways.

NOTE:
Contractor to clear right-of-way and grade parkings for proposed sidewalk. Sidewalk to be constructed by others.

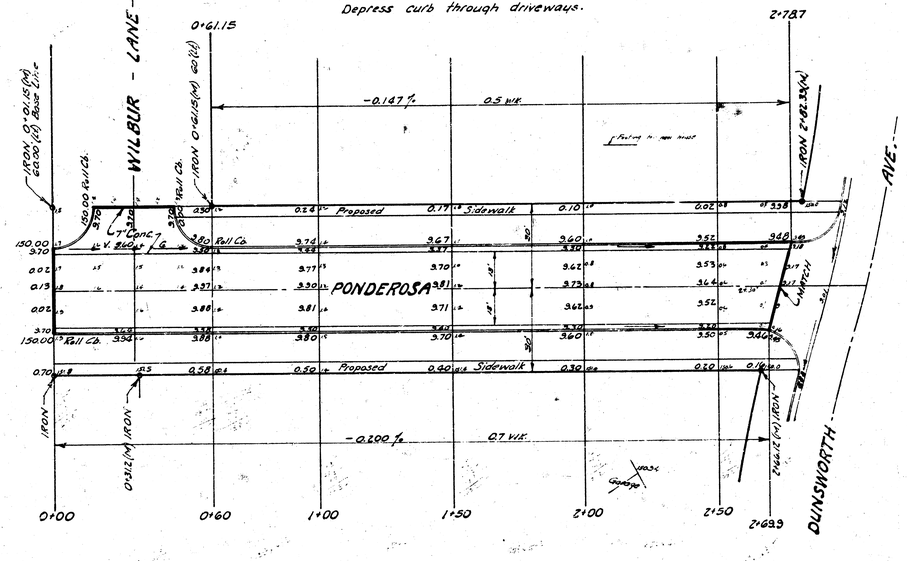

EXCAVATION

	PROPERTY	CITY
	851 Cu. Yds.	124 Cu. Yds.
+10%	85 " "	12 " "
Totals	936 Cu. Yds.	136 Cu. Yds.

JOHN L. ALLEN LICENSED 821 KANSAS PROFESSIONAL ENGINEER

B.E. SMITH 436 KANSAS REGISTERED PROFESSIONAL ENGINEER

PONDEROSA STREET
From W.L. WILBUR LANE
to W.L. DUNSWORTH AVE.
26-2-30 Asph. Conc.
B.E. SMITH CITY ENGINEER
CITY OF WICHITA KANSAS
Date: MAY 1968

Project No. C18-38