B.M. = 175.06 S.W. COR CONC PORCH. HO # 7424 ROCKWOOD

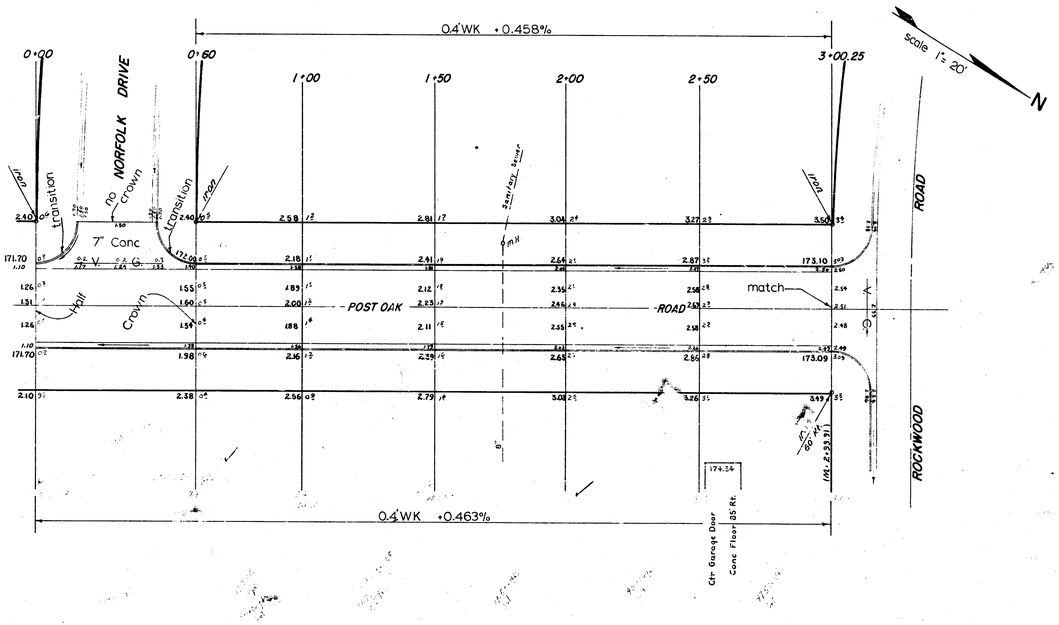

PROPERTY		CITY
Excavation	Comp Fill	Comp Fill
120.4 cu yds	34.4 cu yds	24.4 cu yds
+10% = 12.0 " "	+10% = 3.4 " "	
Totals 132.4 cu yds	37.8 cu yds	

POST OAK ROAD
S.L. ROCKWOOD TO S.L. NORFOLK
26'-2'-30' ASPH CONC
B.E. SMITH CITY ENGINEER
CITY OF WICHITA, KANSAS
DATE: Aug 1964 PROJ C13-35