
Survey Hauser & G2
Plan SEAL
Lay
Checked

N

1" = 20'

30'x100.00'-4C" in Cultivated, N.L. 1st. & East Curb Terrace Drive
Chaining North, S.C. on N.L. Terrace Drive

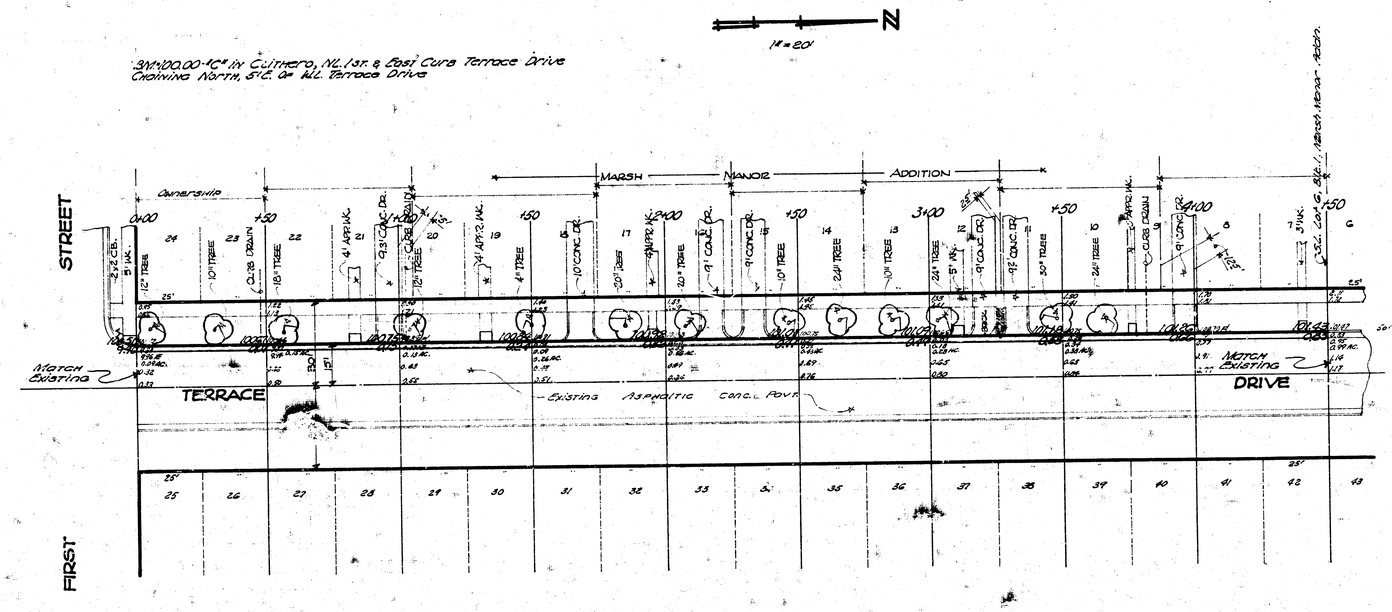

GENERAL NOTES

(1.) Field Engineer to check with property owner as to limits of drive removal and size of drive to be constructed. Plan shows (min) removal.
(2.) Remove and Replace all approach walks as shown.
(3.) Remove and Replace "curb drains" use 4" R.C.P.
(4.) The "leveling of asphalt surface" to be done by "Others".
(5.) Compacted fill under new curb, gutter incidental to cost of curb, gutter.
(6.) Grading of the "parking" to be incidental to the project.

W½ TERRACE DRIVE

N.L. First Street to S.L. Lot 6, Blk. 10
Marsh Manor Addition

Asphaltic Concrete - Reconstruct
Curb & Gutter, Level Surface

City Of Wichita, Kansas
B.E. Smith City Engineer
Date: Oct. 1957, Proj. No. C17-91

B. E. SMITH LICENSED KANSAS PROFESSIONAL ENGINEER 435