




Combined Curb & Gutter (6")

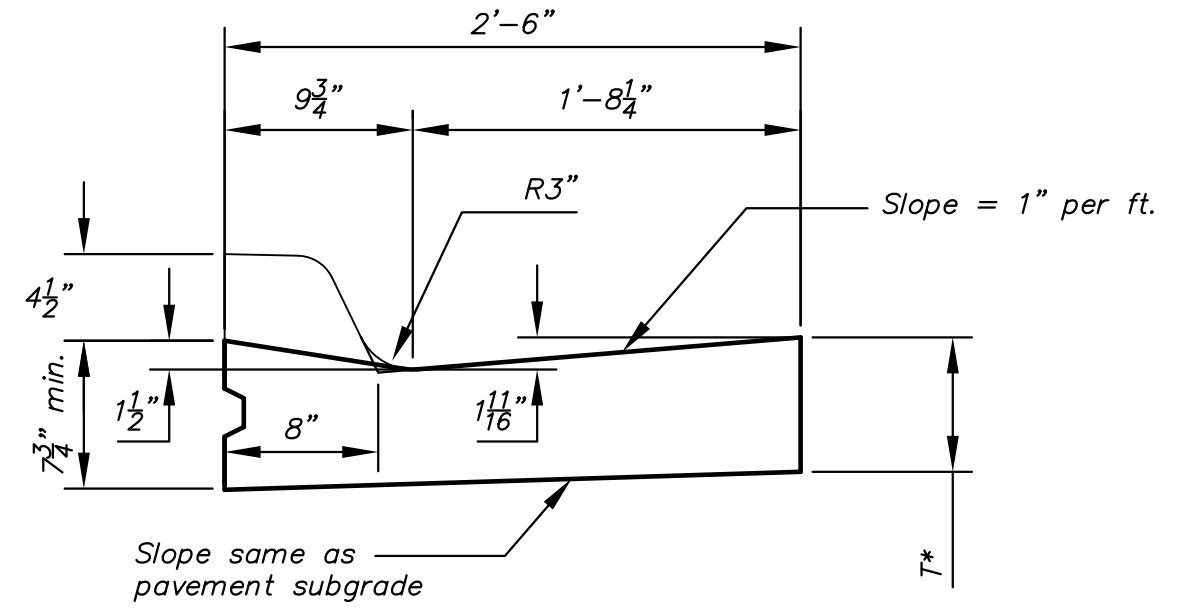


Combined Curb & Gutter (1 1/2")

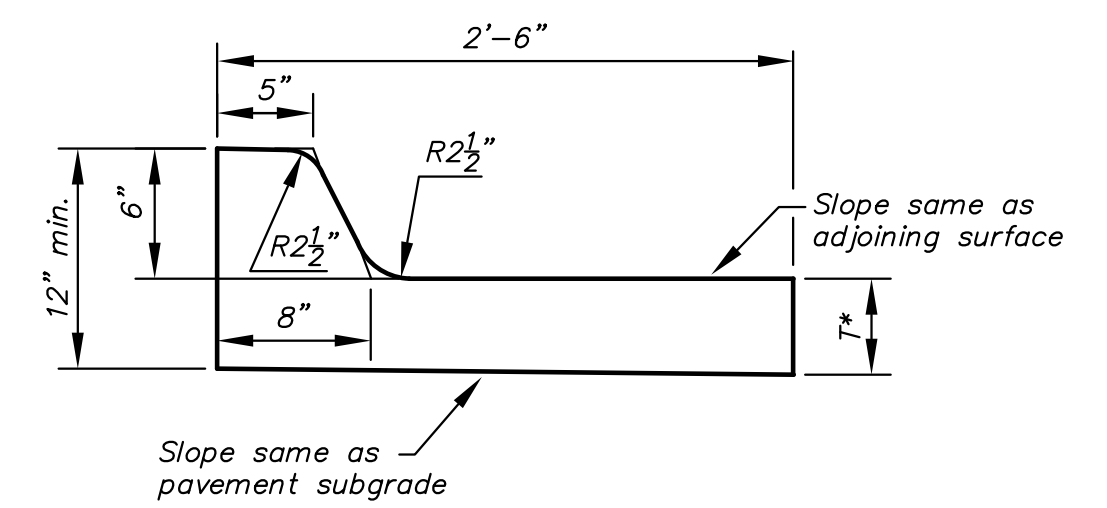


COMBINED CURB & GUTTER, TYPE 1 (6" & 1 1/2"), SPECIAL

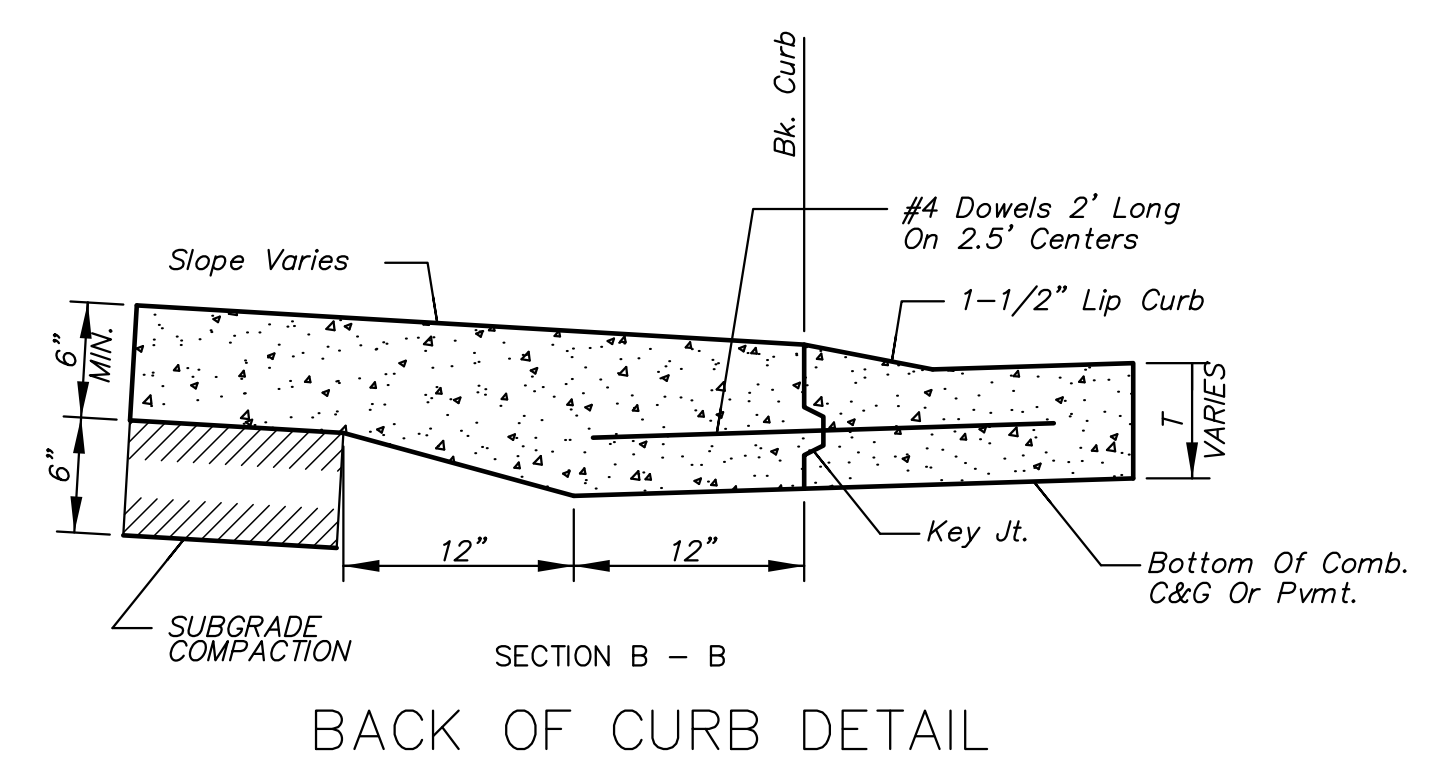

BACK OF CURB DETAIL


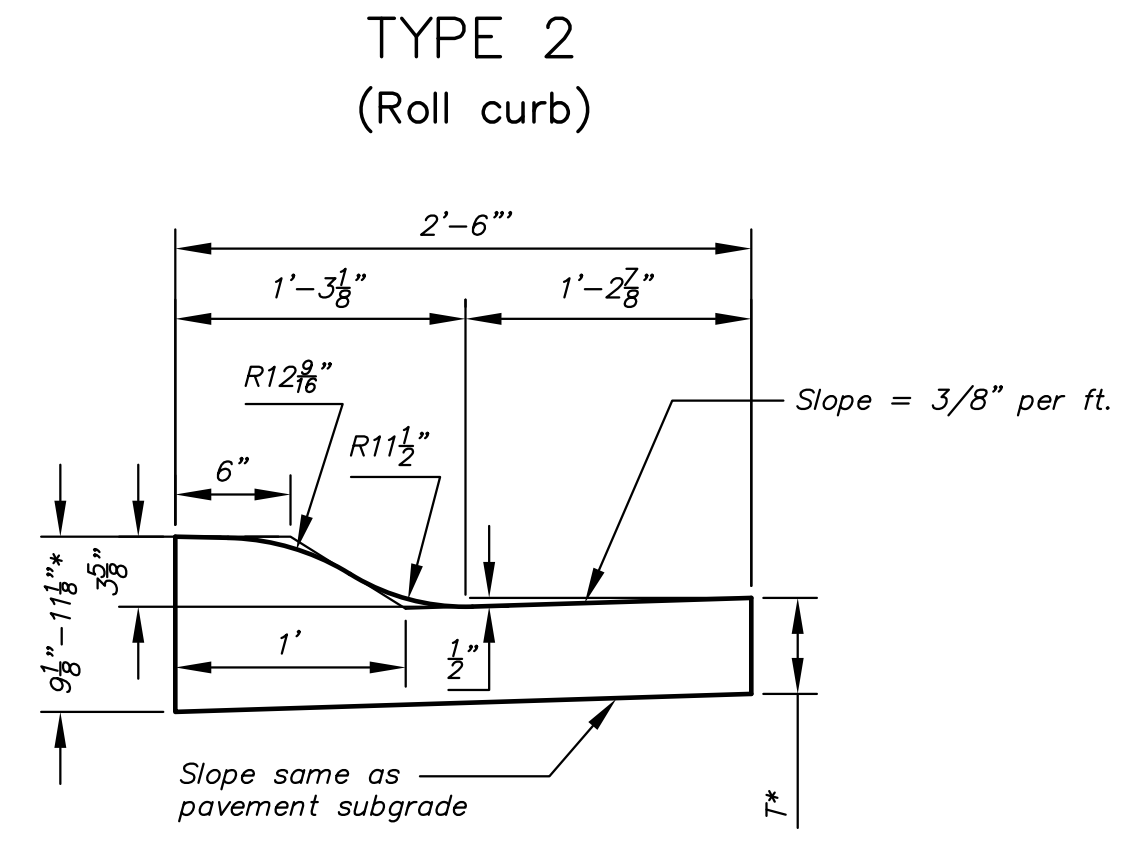


Combined Curb & Gutter (3 5/8")

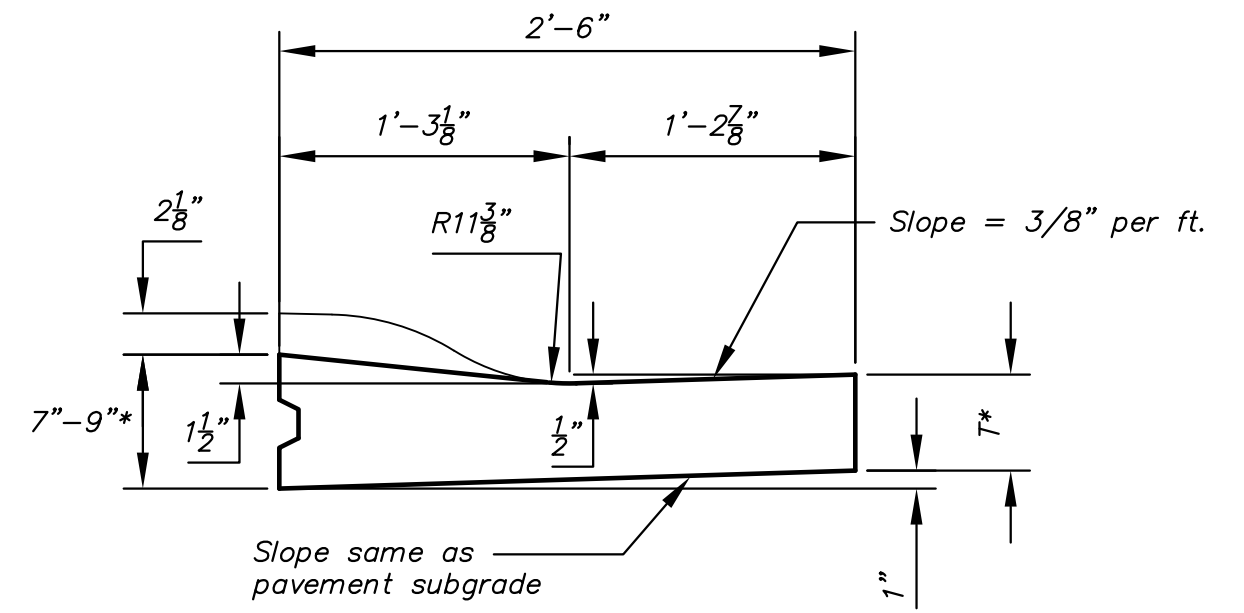


Combined Curb & Gutter (1 1/2")


ALT. LONGITUDINAL CONSTRUCTION JOINT

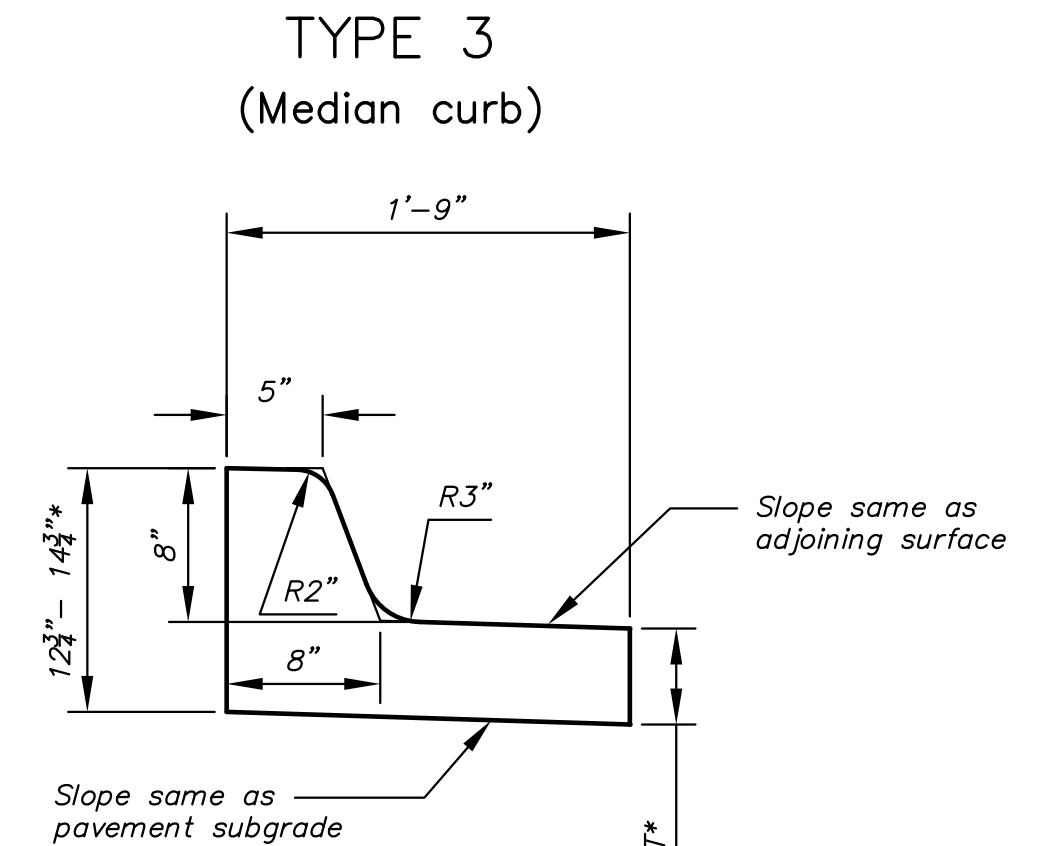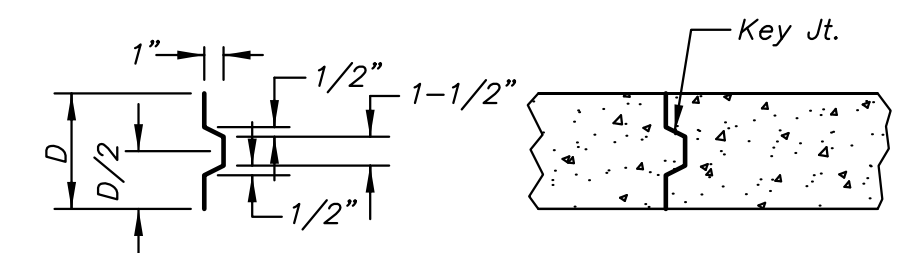


Combined Curb & Gutter (8")

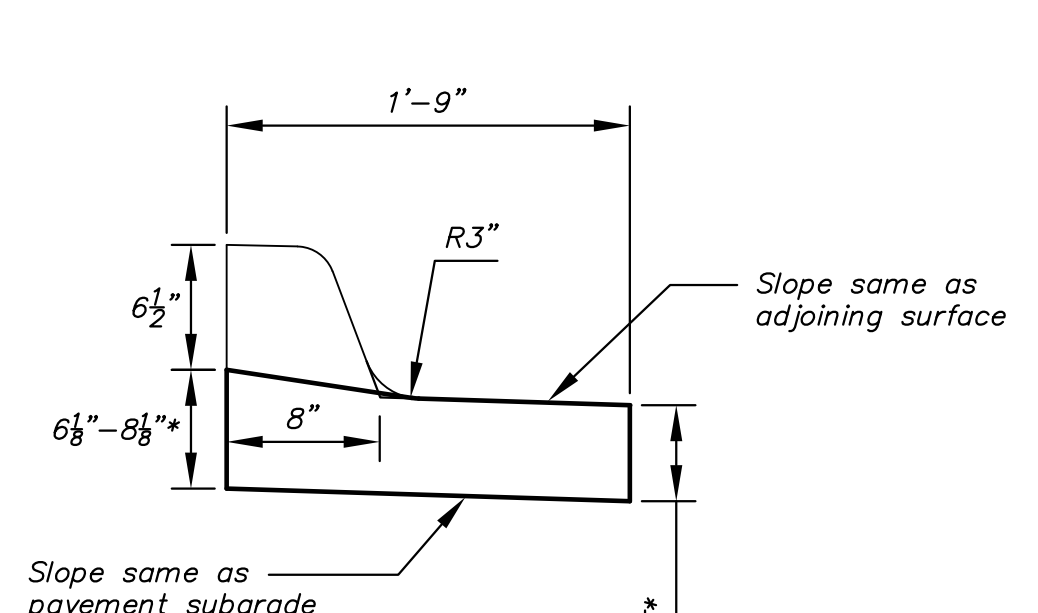


Combined Curb & Gutter (1 1/2")

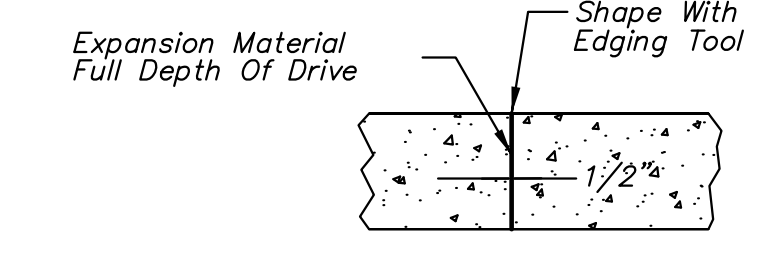

EXPANSION JOINT (E.J.)

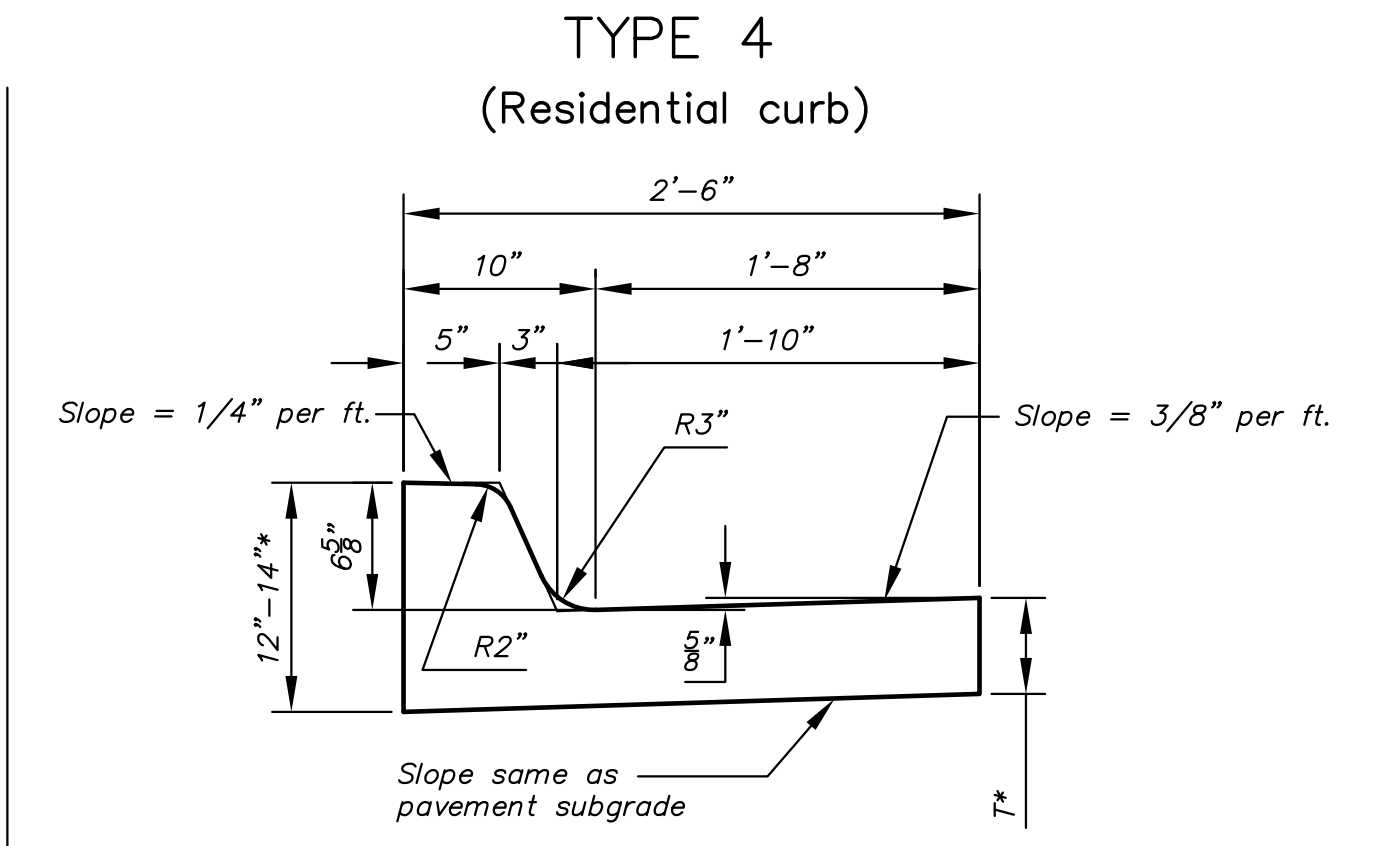

Combined Curb & Gutter (6 5/8")

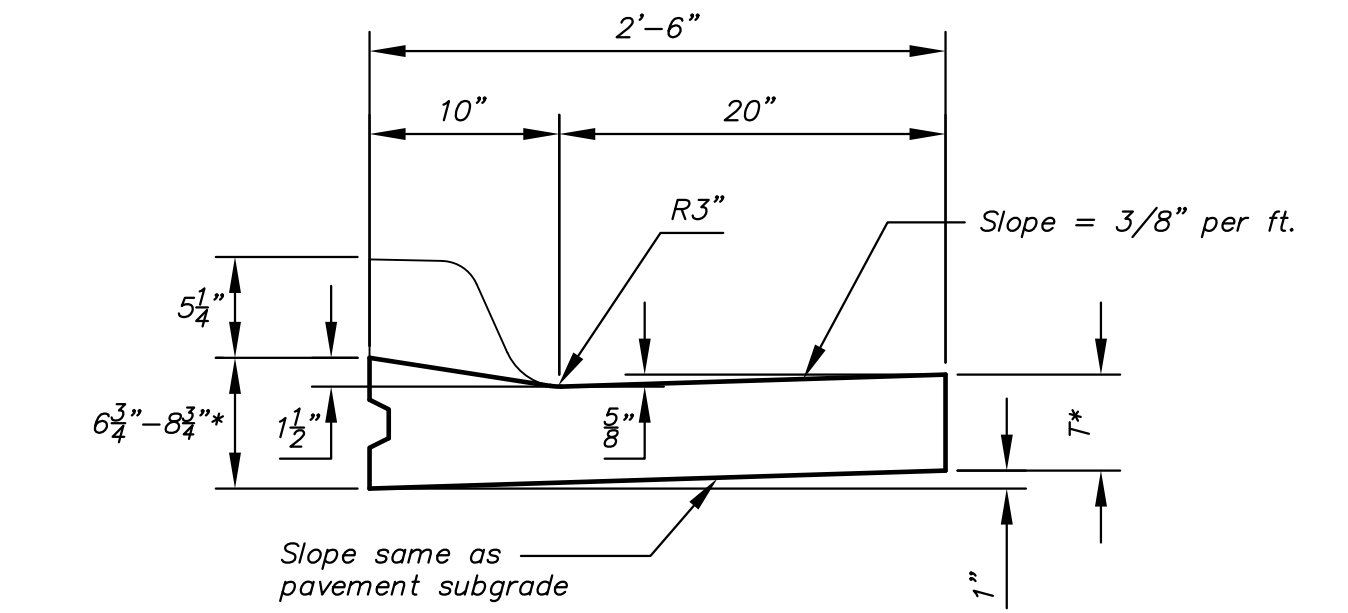

Combined Curb & Gutter (1 1/2")

T* = Thickness of curb to adjust with pavement thickness

GENERAL NOTES

1. Expansion (isolation) joints shall be constructed a maximum of 300' apart and at all Pls, PCs, cul-de-sac quadrants, and ends of returns.
2. Contraction joints shall be constructed a minimum of 12' apart.
3. Joint sealer shall be required at all joints on arterial and industrial streets and at intersections on residential streets.



CURB & GUTTER DETAILS		
CITY ENGINEER GARY L. JANZEN, P.E.		
PROJECT NUMBER 472-85120	OCA NUMBER 715732	DATE 12/2010
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501		SHEET 12 OF 84