
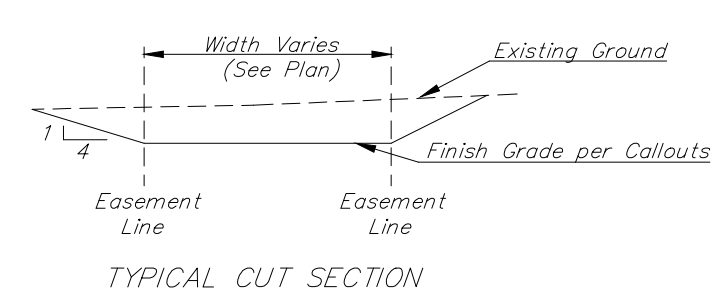


EROSION CONTROL MEASURE	UNITS	QUANTITY
CURB INLET BARRIER	EA.	2 (MAINTAIN)
SILT FENCE	L.F.	300 (INSTALL)
CONSTRUCTION ENTRANCE	EA.	1 (INSTALL)
DROP INLET BARRIER	EA.	4 (INSTALL)
STRAW BALE BARRIER	EA.	3 (INSTALL)
BACK OF CURB PROTECTION	L.F.	2,252 (INSTALL)



EROSION CONTROL PLAN LEGEND
(Installation Details Found in the SWP2 Plan)

- CONSTRUCTION ENTRANCE
- DROP INLET PROTECTION
- DITCH CHECK
- BACK OF CURB PROTECTION
- EASEMENTS TO BE GRADED
- CURB INLET PROTECTION
- SILT FENCE

NO SCALE

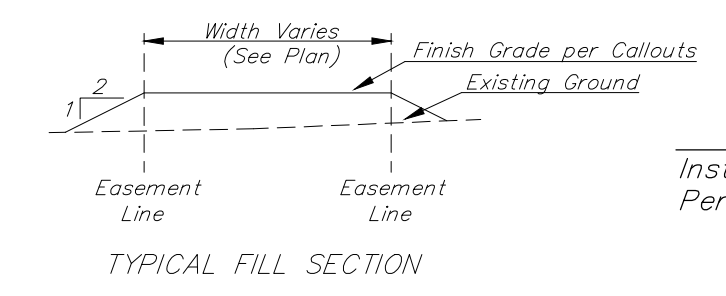

SECTION A-A

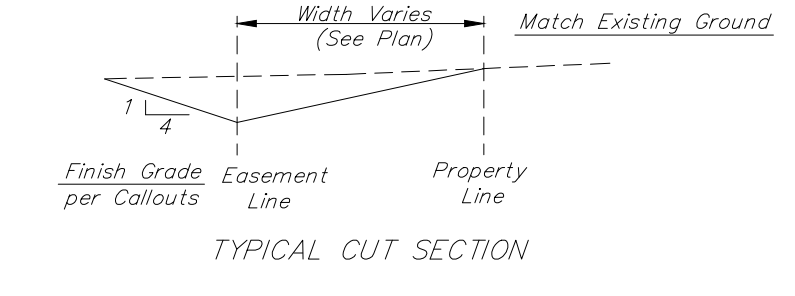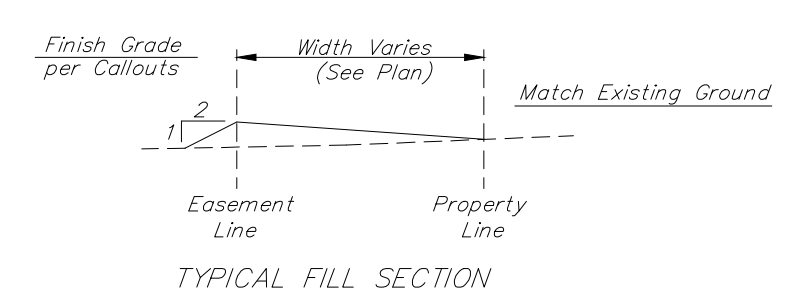

SECTION B-B

Section A-A shall be used on interior easements. Section B-B shall be used on easements that abut adjacent property or R/W of S. Anderson. The elevation at the property line shall match existing grade.

- = Easements To Be Graded
- = Proposed Spot Grade

Contractor shall fine grade the easements as shown to within ±0.2' of the elevations given on plan. The contractor shall 'straight' grade the easements between the elevations given. Where a callout designates 'Match', the contractor will grade to the existing ground elevation. All costs for easement grading shall be included in lump sum bid item "Easement Grading."

Baughman

Auburn Hills 16th Addition - Phase 1A
Erosion Control and Easement Grading Plan
Paving Improvements

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-2771 F 316-262-0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 472-84290	DESIGN DMV	DRAWN DMV
REVISIONS:	APPROVED DATE 08/08/16	SCALE 1" = 80'
		SHEET 11 OF 21

AuburnHills16thPhase1BStrECpln

