

BM 117.29 "x" Cut in Top CB @ E. end of Rad. on SE. Cor of 12TH & Spruce.
BM 116.75 "G" in Globe on CB @ W. end of Rad. on SW Cor. of 12TH & Madison
BM 121.06 "M" in Mueller Top of Fire Hydrant on N.W. Cor of 12TH & Grove
Base Line is ℄ of 12TH St.



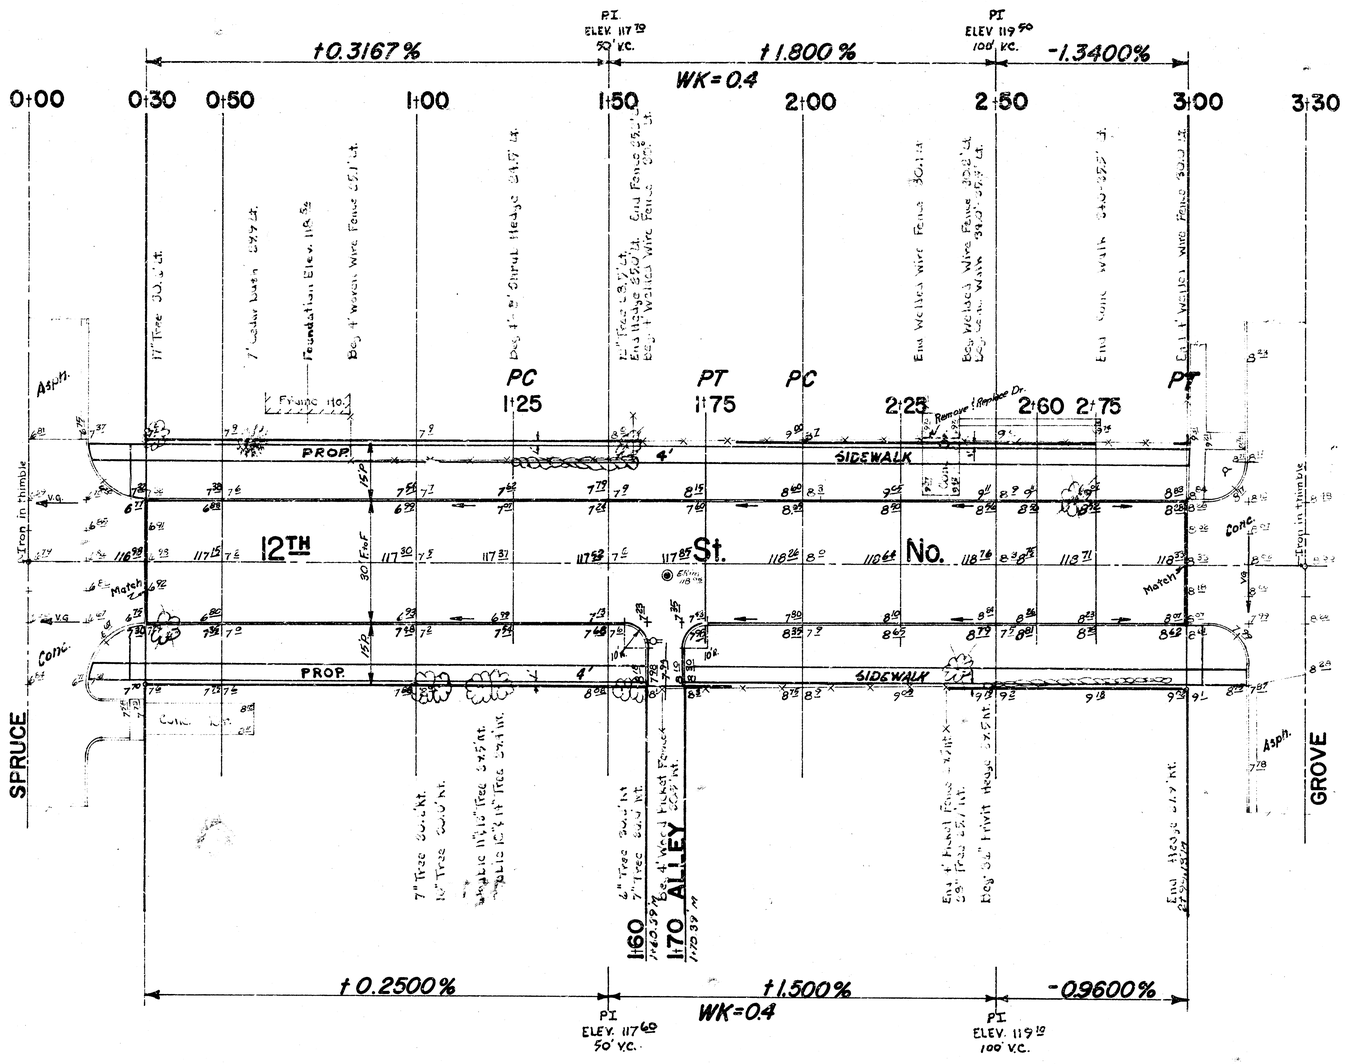

General Notes:

1. Excess excavated material to be used on Murdock Street. Proj. C10-24.
2. This project is to be corrdinated with projects C10-10, C10-11, C10-9 and C10-24.
3. Excavation from Sidewalk project can be used for parking fill on all street projects.

"EARTHWORK QUANTITIES"

EXCAVATION			COMP. FILL			SGM		
CITY		PROP.	CITY		PROP.	CITY		PROP.
5.8	CUBIC YARDS	179.2	0.0	CUBIC YARDS	3.7	5.6	CUBIC YARDS	151.3
.6	↑ 10 %	17.9	.0	↑ 10 %	.4	.6	↑ 10 %	15.1
6.4	TOTAL	197.1	0.0	TOTAL	4.1	6.2	TOTAL	166.4

NOTE TO FIELD ENGINEER & CONTRACTOR:
Grade parking and Clear R/W for proposed Sidewalk. Sidewalk to be Constructed by "CONTRACTORS".

B. E. SMITH 436 KANSAS REGISTERED ENGINEER

12TH St. No.- EL. Spruce to WL. Gro
6" Concrete — 30' F to F w/Int. Curb
City of Wichita, Kansas.

B. E. Smith — City Enginner SHEET 1 of 2
Date: Project No. C10-12