FHWA REGION NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS		1978	1	143

PROJ. NO. (BC) 96-87 K-044-1(28) PARTS I & II

STATE OF KANSAS

DEPARTMENT OF TRANSPORTATION

SIGNING AND DELINEATION FOR STATE HIGHWAY

SIGNING AND DELINEATION

SEDGWICK COUNTY
K-96

TRAFFIC TO BE CARRIED THROUGH CONSTRUCTION

INDEX OF SHEETS

1	TITLE SHEET
2	POST SPACING & SIGN ANGLE DETAILS
3	HEIGHT & LATERAL DISTANCE FOR ERECTION
4	MOUNTING & POSITIONING DETAILS FOR DELINEATORS
5-6	DETAILS FOR FOOTINGS, BASE PLATES, BREAKAWAY SIGN POST, & ERECTION DETAILS
7-16	PLAN SHEETS
17-34	QUANTITY SHEETS
35	POST & FOOTING REMOVALS
36	RECAPITULATION SHEET
37-40	DETAILS FOR SIGN BLANKS (FLAT SHEETS)
41-54	LEGEND DETAILS FOR SIGNS (PROCESSED)
55	DESIGN & ASSEMBLY DETAILS & POSITIONING FOR MILEPOST
56-60	MOUNTING DETAILS FOR ERECTION OF SIGNS & ASSEMBLIES (FLAT SHEET) ON WOOD POSTS & TUBULAR SUPPORTS
61	MOUNTING OF STRUCTURAL PANEL SIGNS & FLAT SHEET SIGNS ON TUBULAR SUPPORTS
62	MOUNTING DETAILS OF FLAT SHEET SIGNS TO STEEL SIGN POSTS
63-64	FABRICATION & ASSEMBLY DETAILS FOR STRUCTURAL & EXTRUDED SIGN PANELS
65-67	DETAILS FOR REMOVABLE LEGEND (ARROWS & BUTTONS)
68-80	LEGEND DETAILS FOR REMOVABLE LEGEND SIGNS
81-82	MOUNTING DETAILS FOR REMOVABLE LEGEND ON STRUCTURAL PANEL
83	MOUNTING OF STRUCTURAL PANEL ON STEEL I-BEAM POST
84	FASTENERS FOR REMOVABLE CUTOUT LETTERS
85	ACRYLIC PLASTIC BUTTON REFLECTORS FOR REMOVABLE CUTOUT LEGEND SUPPORT FRAMES
86	FASTENERS FOR REMOVABLE CUTOUT LEGEND BUTTON SUPPORT FRAMES
87-109	PLAN SHEETS FOR OVERHEAD SIGN STRUCTURES
110	PLAN SHEETS FOR CANTILEVER STRUCTURES
111-113	PLAN SHEETS FOR BRIDGE MOUNTED SIGN ATTACHMENTS
114-138	SIGN STRUCTURE DETAILS
139	ELECTRICAL DETAILS
140-142	GUARD FENCE DETAILS
143	TRAFFIC CONTROL

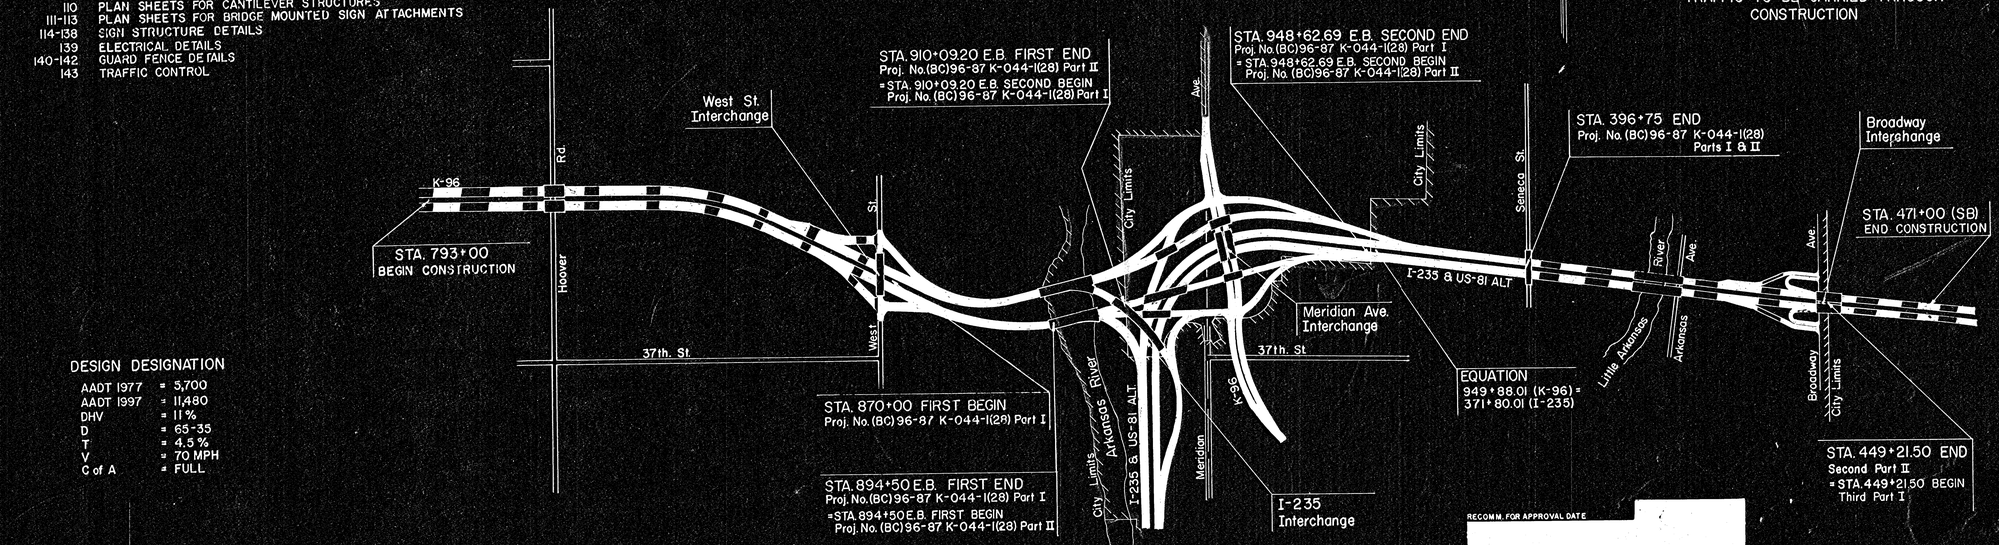

DESIGN DESIGNATION

AADT 1977	= 5,700
AADT 1997	= 11,480
DHV	= 11%
D	= 65-35
T	= 4.5%
V	= 70 MPH
C of A	= FULL

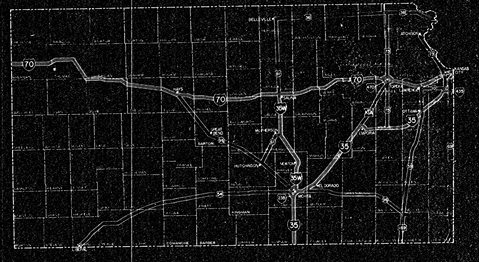

PROJECT NUMBER	(BC) 96-87 K-044-1(28) PART I		(BC) 96-87 K-044-1(28) PART II		(BC) 96-87 K-044-1(28) PARTS I & II	
GROSS LENGTH OF PROJECT	6,303.49		4,179.51		10,483.00	
EXCEPTION	NONE		NONE		NONE	
ADDITION	NONE		NONE		NONE	
	FEET	MILES	FEET	MILES	FEET	MILES
NET LENGTH OF PROJECT	6,303.49	1.194	4,179.51	.791	10,483.00	1.985
NET LENGTH OF BRIDGES	NONE	NONE	NONE	NONE	NONE	NONE
NET LENGTH OF PROJECT	6,303.49	1.194	4,179.51	.791	10,483.00	1.985

RECOMM. FOR APPROVAL DATE

HIGHWAY MARKING ENGINEER
KANSAS DEPARTMENT OF TRANSPORTATION

RECOM. FOR APPROVAL DATE

ENGINEER OF MAINTENANCE
KANSAS DEPARTMENT OF TRANSPORTATION

RECOM. FOR APPROVAL DATE

ENGINEER
FEDERAL HIGHWAY ADMINSTRATION
DEPARTMENT OF TRANSPORTATION

APPROVED DATE

STATE HIGHWAY ENGINEER
KANSAS DEPARTMENT OF TRANSPORTATION

APPROVED DATE

DIVISION ENGINEER,
FEDERAL HIGHWAY ADMINSTRATION
DEPARTMENT OF TRANSPORTATION