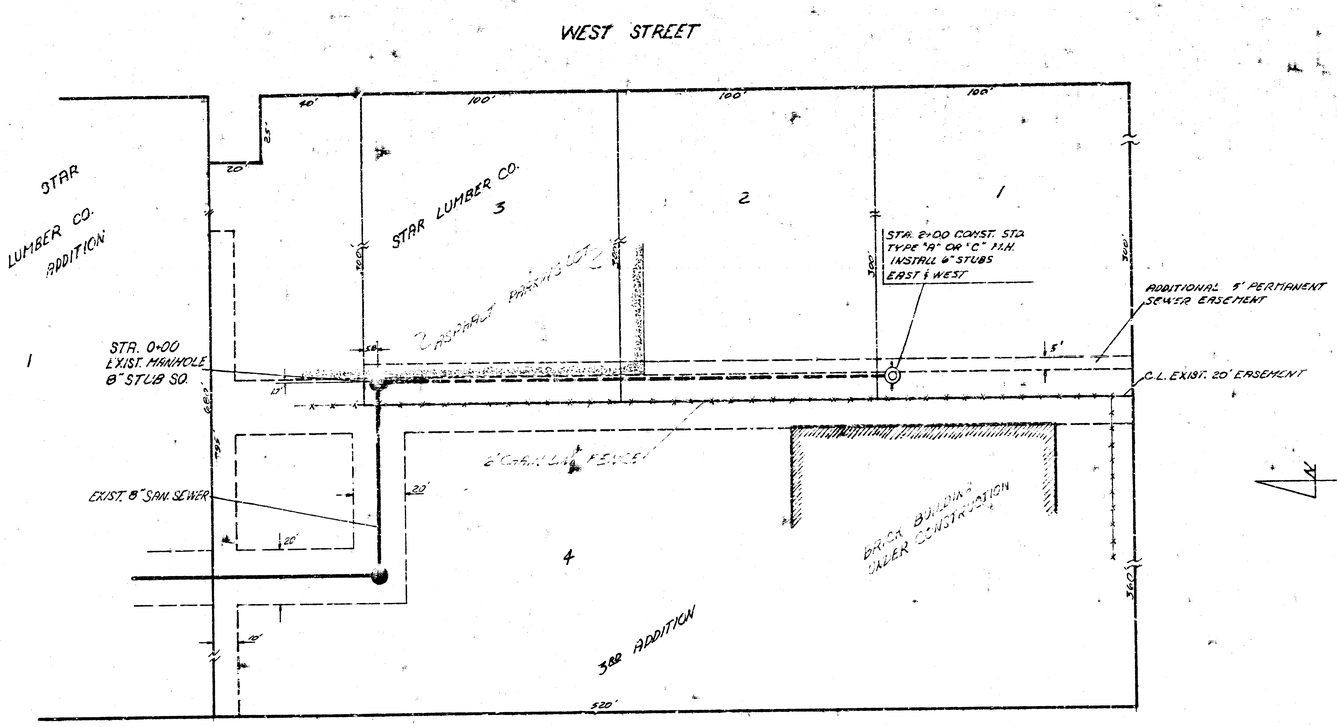



NOTE TO CONTRACTOR

This project shall be constructed under the supervision of the CITY ENGINEER and conform to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for cost of Engineering Inspection.

NOTE: SEWER TO BE BACKFILLED IN ACCORDANCE WITH CITY STANDARD SPECIFICATIONS TO 6" ABOVE THE TOP OF THE PIPE. THE REMAINING TRENCH BACKFILL MAY CONSIST OF UNCOMPACTED EXCAVATED MATERIAL PLACED IN SUCH A MANNER WHICH WILL PREVENT DAMAGE TO THE SEWER PIPE. UNCOMPACTED BACKFILL SHOULD BE MOUNDED SUFFICIENTLY TO COMPENSATE FOR SETTLEMENT.

SCALES

PLAN: 1"=30'
PROFILE HORT. 1"=30'
VERT. 1"=5'

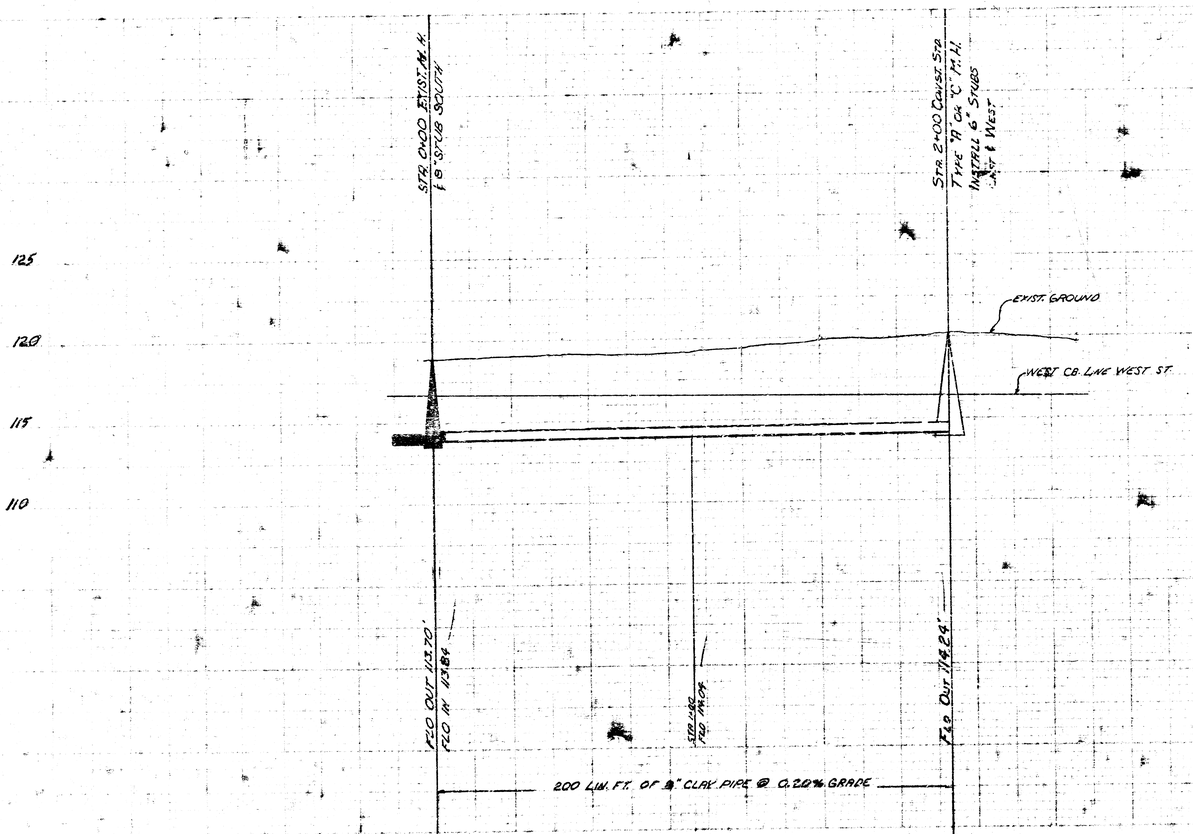

SANITARY SEWER FOR STAR LUMBER CO. 3RD ADDITION
CITY OF WICHITA, KANSAS
R. W. LINN - CITY ENGINEER
PROJ. NO. DBKW704064
DATE: SHEET 1 OF 1