


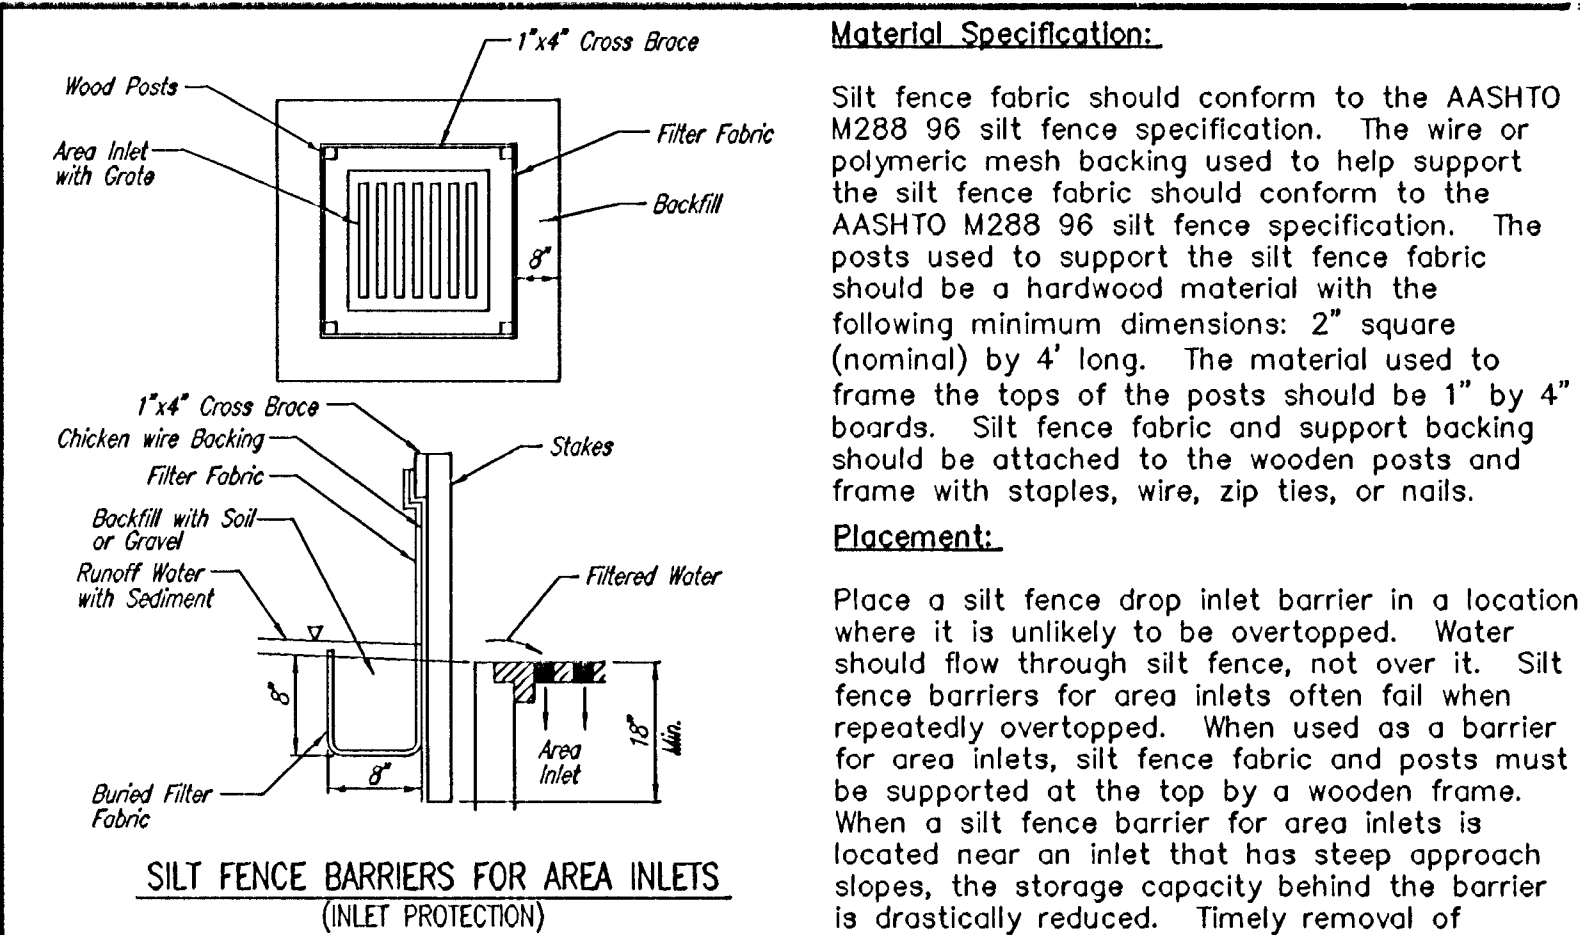

Material Specification:

Silt fence fabric should conform to the AASHTO M288 96 silt fence specification. The wire or polymeric mesh backing used to help support the silt fence fabric should conform to the AASHTO M288 96 silt fence specification. The posts used to support the silt fence fabric should be a hardwood material with the following minimum dimensions: 2" square (nominal) by 4' long. The material used to frame the tops of the posts should be 1" by 4" boards. Silt fence fabric and support backing should be attached to the wooden posts and frame with staples, wire, zip ties, or nails.

Placement:

Place a silt fence drop inlet barrier in a location where it is unlikely to be overtopped. Water should flow through silt fence, not over it. Silt fence barriers for area inlets often fail when repeatedly overtopped. When used as a barrier for area inlets, silt fence fabric and posts must be supported at the top by a wooden frame. When a silt fence barrier for area inlets is located near an inlet that has steep approach slopes, the slope capacity behind the barrier is drastically reduced. Timely removal of sediment must occur for a barrier to operate properly in this location.

Proper installation method:

Excavate a trench around the perimeter of the area inlet that is at least 8" deep by 8" wide. Drive posts to a depth of at least 18" around the perimeter of the area inlet. The distance between posts should be 4' or less. If the distance between two adjacent corner posts is more than 4', add another post(s) between them. Connect the tops of all the posts with a wooden frame made of 1" by 4" boards. Use nails or screws for fastening. Attach the wire or polymeric-mesh backing to the outside of the post/frame structure with staples, wire, zip ties, or nails. Roll out a continuous length of silt fence fabric long enough to wrap around the perimeter of the area inlet. Add more length for overlapping the fabric joint. Place the edge of the fabric in the trench, starting at the outside edge of the trench. Line all three sides of the trench with the fabric. Backfill over the fabric in the trench with the excavated soil and compact. After filling the trench, approximately 24" to 36" of silt fence fabric should remain exposed. Attach the silt fence to the outside of the post/frame structure with staples, wire, zip ties, or nails. The joint should be overlapped to the next post.


Note: When a silt fence barrier for area inlet is placed in a shallow median ditch, make sure that the top of the barrier is not higher than the paved road. In this configuration, water may spread onto the roadway causing a hazardous condition.

List of common placement/installation mistakes to avoid:

Water should flow through a silt fence barrier for area inlet-not over it. Place a silt fence barrier for area inlet in a location where it is unlikely to be overtopped. Silt fence barrier for area inlets often fail when repeatedly overtopped. Do not place posts on the outside of the silt fence barrier for area inlet. In this configuration, the force of the water is not resisted by the posts, but only by the staples (wire, zip ties, nails, etc.). The silt fence will rip and fail. Do not install silt fence barrier for area inlets without framing the top of the posts. The corner posts around area inlets are stressed in two directions whereas a normal silt fence is only stressed in one direction. This added stress requires more support. Inspection and Maintenance: Silt fence barrier for area inlets should be inspected every 7 days and within 24 hours of a rainfall of 1/2" or more.

The following is a list of questions that should be addressed during each inspection:

Does water flow under the silt fence?
Does the silt fence sag excessively?
Has the silt fence torn or become detached from the posts?
Does sediment need to be removed from behind the area inlet barrier?

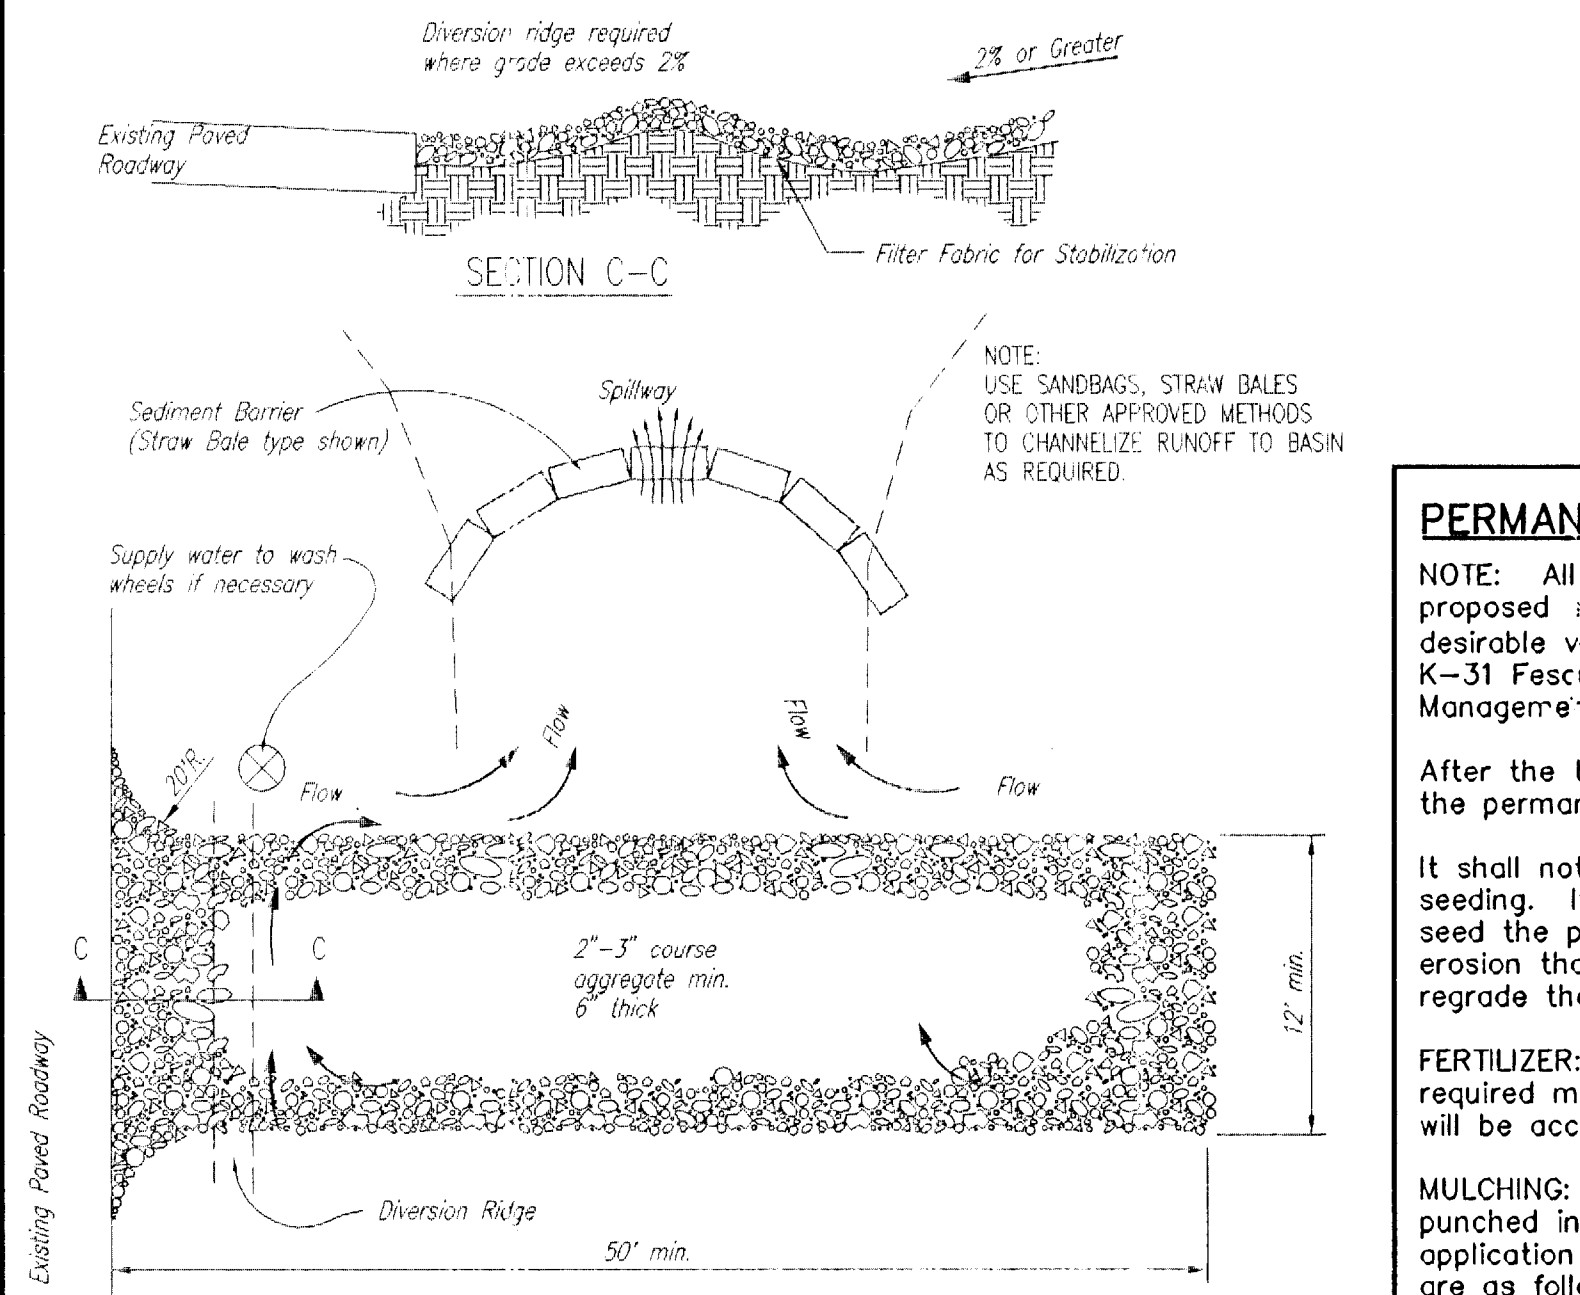

STABILIZED CONSTRUCTION ENTRANCE
(LOCATION TO BE DETERMINED BY CONTRACTOR)


NOTES:

1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT.

2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTRANCE ONTO PUBLIC RIGHT-OF-WAY.

3. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN, AS SHOWN ABOVE.

4. DRIVE ENTRANCES ONTO RESIDENTIAL LOTS WILL NOT BE REQUIRED TO HAVE THE SEDIMENT BARRIER SHOWN, BUT WHEEL WASHING MAY BE REQUIRED IF STABILIZED ENTRANCE IS NOT SUFFICIENT TO KEEP MUD FROM BEING TRACKED ONTO ADJACENT STREET. ENTRANCE SHALL EXTEND FROM BACK OF CURB TO DWELLING.

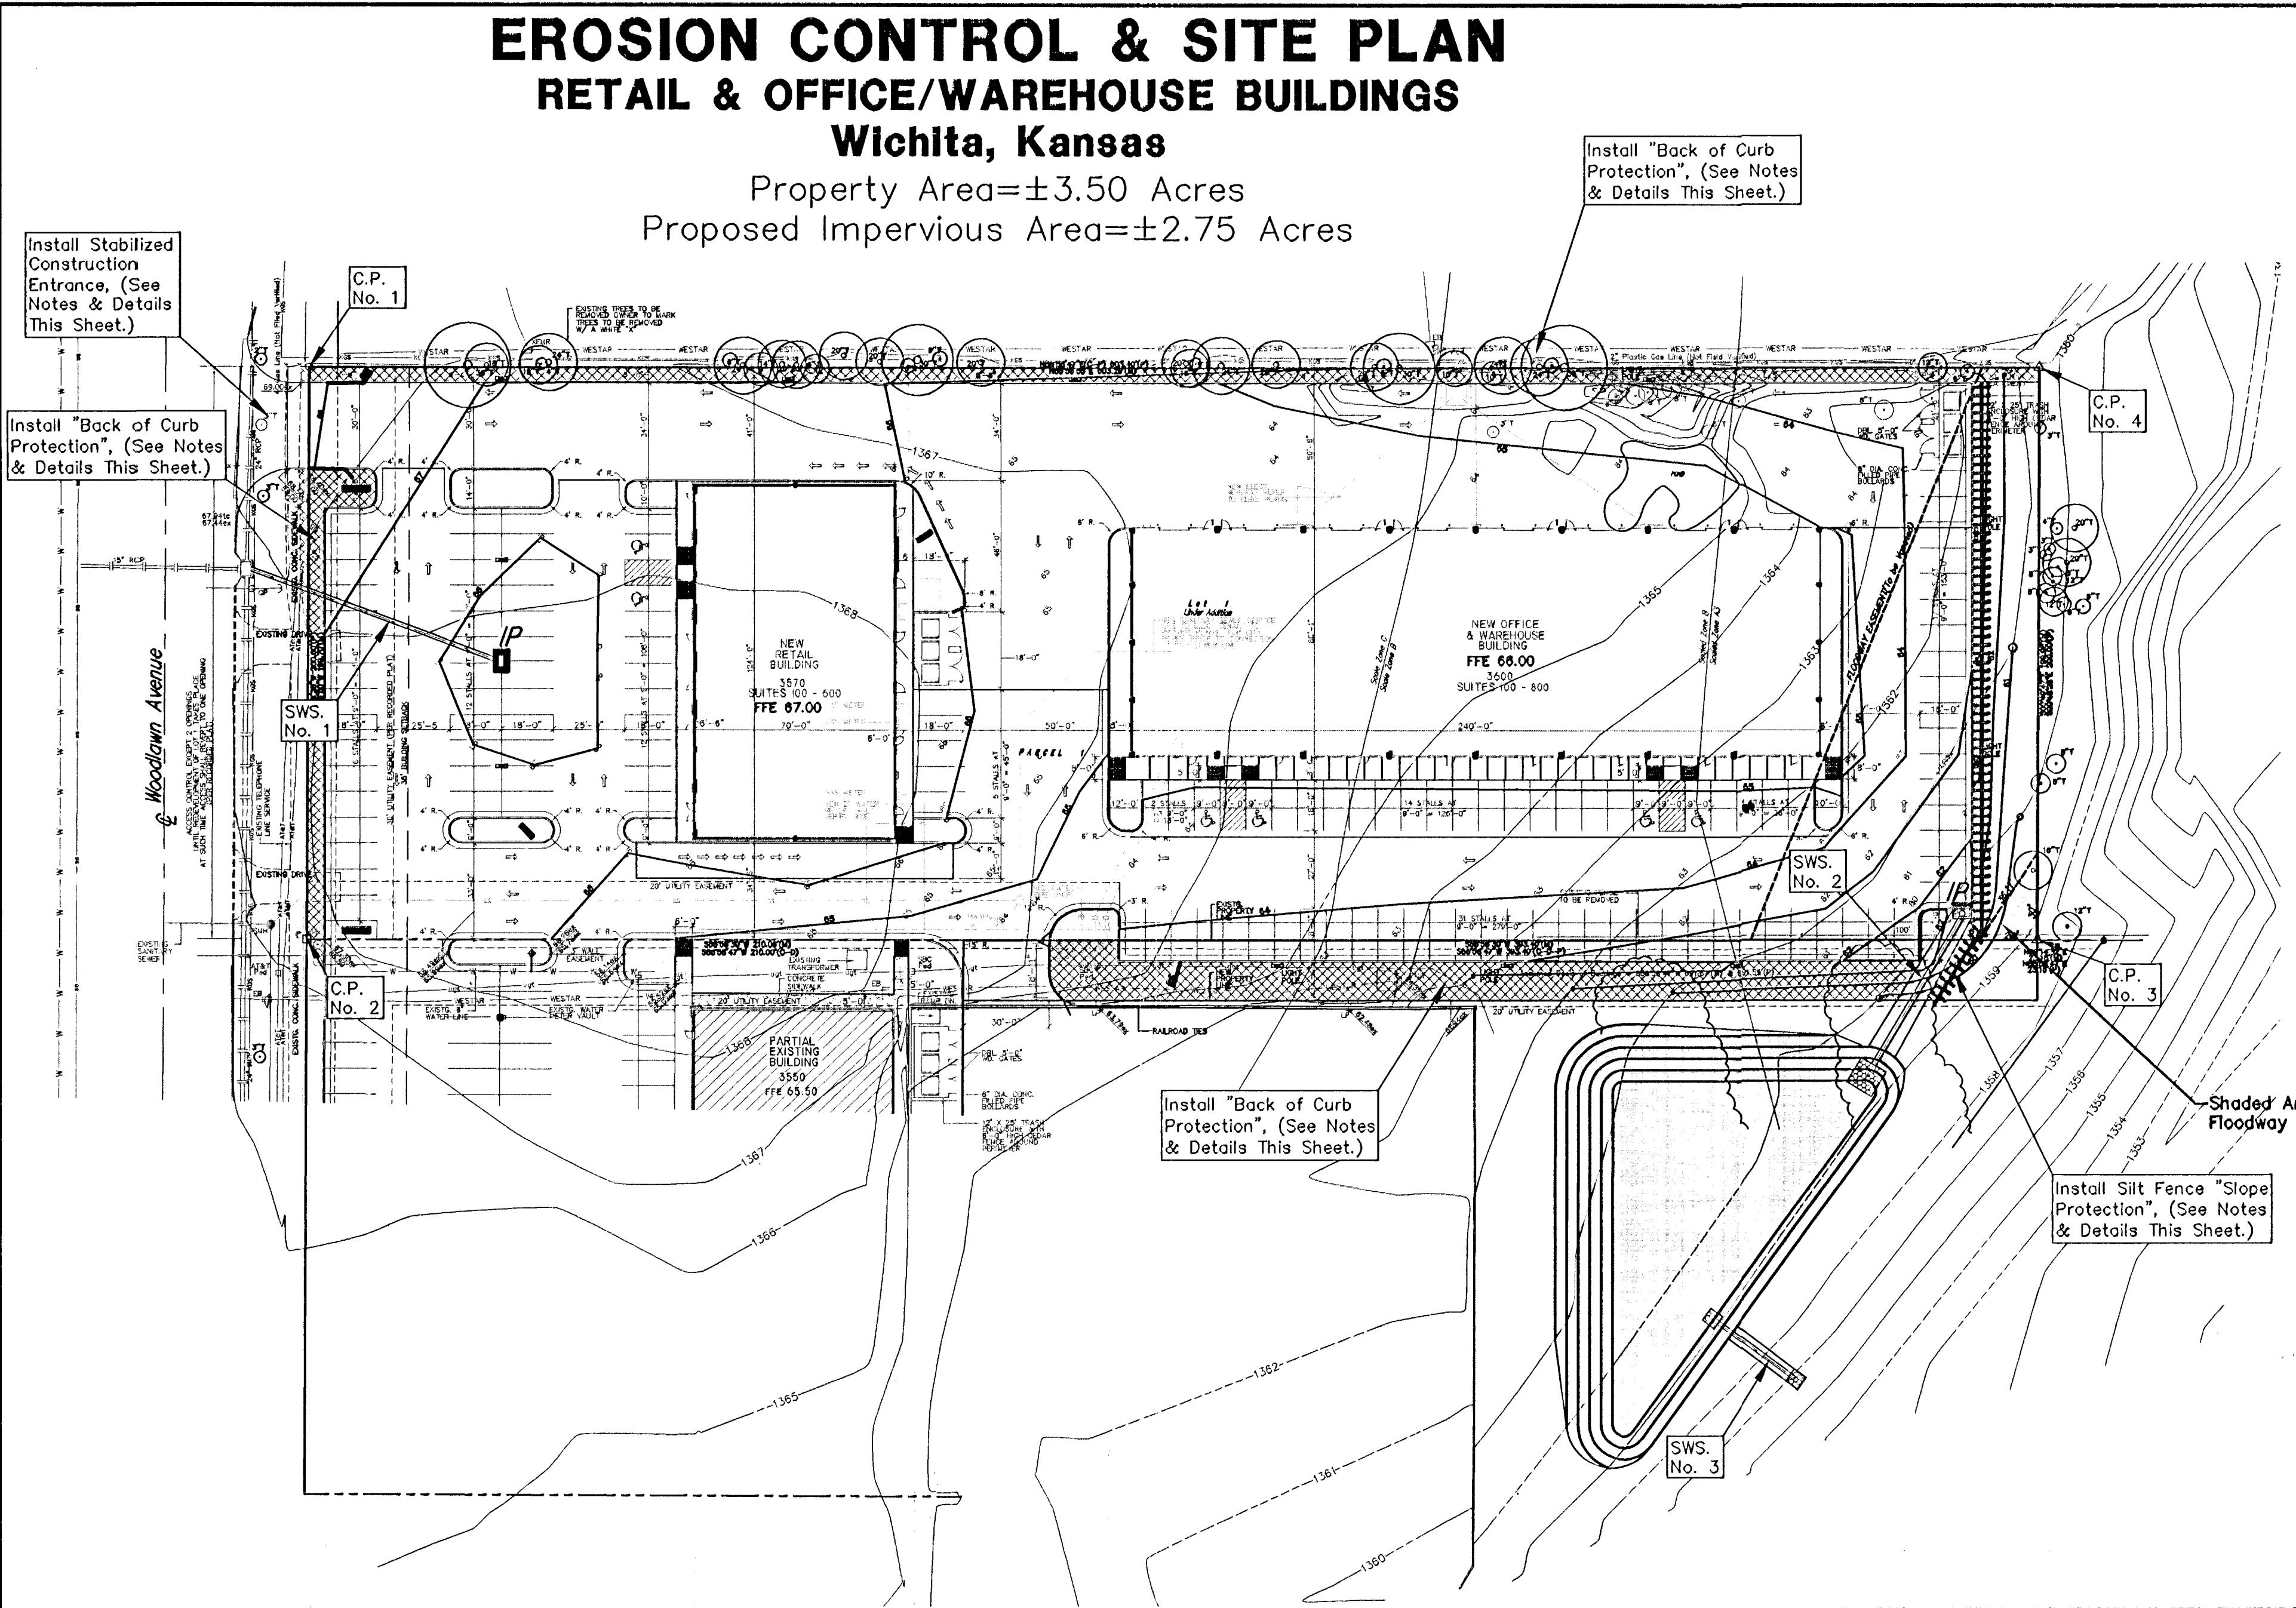

PERMANENT SEEDING

NOTE: All areas disturbed by construction, excepting the paved areas, proposed added area and areas of undisturbed native sod or other desirable vegetation shall be fertilized (limed when required), seeded with K-31 Fescue, and mulched. Soil preparation shall conform to the Best Management Practices for Erosion and Sediment Control.

After the temporary seeding has been completed on the entire project, the permanent seeding shall be done during the normal seeding season.

It shall not be required to till the area to bare ground prior to permanent seeding. If temporary cover has provided stable slopes with no erosion, seed the permanent grasses into the existing cover. If there has been erosion that requires repair prior to seeding, then it may be necessary to regrade the area, resulting in bare ground.

FERTILIZER: A ratio and application rate that equals or exceeds the required minimum rate per acre listed in Summary of Seeding Quantities will be acceptable.

MULCHING: Mulch shall be spread uniformly over all disturbed areas and punched in the soil, unless otherwise noted on the plans. The rate of application per acre, thickness in place, for the various mulching materials are as follows:

Prairie Hay Mulching 1-3/4 to 2-1/4 Tons per Acre = 1-1/2" loose depth spread uniformly over acre.

The above rates are a guide. It will be at the discretion of the Engineer to determine what rate is sufficient for adequate protection of newly seeded areas.

The amount of mulch required shall be determined in the field.

SUMMARY OF PERMANENT SEEDING QUANTITIES		
RATE OF APPLICATION (Pure Live Seed per acre)	DESCRIPTION	QUANTITY
100 Lbs./Acre	K-31 Fescue Grass Seed	As Required
125 Lbs./Acre	Fertilizer(16-20-0)	As Required
	Mulching	As Required

BACK OF CURB PROTECTION DETAIL

NOTE: All areas disturbed by construction, excepting the paved areas, proposed added area and areas of undisturbed native sod or other desirable vegetation shall be fertilized (limed when required), seeded with K-31 Fescue, and mulched. Soil preparation shall conform to the Best Management Practices for Erosion and Sediment Control.

After the temporary seeding has been completed on the entire project, the permanent seeding shall be done during the normal seeding season.

It shall not be required to till the area to bare ground prior to permanent seeding. If temporary cover has provided stable slopes with no erosion, seed the permanent grasses into the existing cover. If there has been erosion that requires repair prior to seeding, then it may be necessary to regrade the area, resulting in bare ground.

FERTILIZER: A ratio and application rate that equals or exceeds the required minimum rate per acre listed in Summary of Seeding Quantities will be acceptable.

MULCHING: Mulch shall be spread uniformly over all disturbed areas and punched in the soil, unless otherwise noted on the plans. The rate of application per acre, thickness in place, for the various mulching materials are as follows:

Prairie Hay Mulching 1-3/4 to 2-1/4 Tons per Acre = 1-1/2" loose depth spread uniformly over acre.

The above rates are a guide. It will be at the discretion of the Engineer to determine what rate is sufficient for adequate protection of newly seeded areas.

The amount of mulch required shall be determined in the field.

SUMMARY OF PERMANENT SEEDING QUANTITIES		
RATE OF APPLICATION (Pure Live Seed per acre)	DESCRIPTION	QUANTITY
100 Lbs./Acre	K-31 Fescue Grass Seed	As Required
125 Lbs./Acre	Fertilizer(16-20-0)	As Required
	Mulching	As Required

SILT FENCE BARRIERS

NOTE: All areas disturbed by construction, excepting the paved areas, proposed added area and areas of undisturbed native sod or other desirable vegetation shall be fertilized (limed when required), seeded with K-31 Fescue, and mulched. Soil preparation shall conform to the Best Management Practices for Erosion and Sediment Control.

After the temporary seeding has been completed on the entire project, the permanent seeding shall be done during the normal seeding season.

It shall not be required to till the area to bare ground prior to permanent seeding. If temporary cover has provided stable slopes with no erosion, seed the permanent grasses into the existing cover. If there has been erosion that requires repair prior to seeding, then it may be necessary to regrade the area, resulting in bare ground.

FERTILIZER: A ratio and application rate that equals or exceeds the required minimum rate per acre listed in Summary of Seeding Quantities will be acceptable.

MULCHING: Mulch shall be spread uniformly over all disturbed areas and punched in the soil, unless otherwise noted on the plans. The rate of application per acre, thickness in place, for the various mulching materials are as follows:

Prairie Hay Mulching 1-3/4 to 2-1/4 Tons per Acre = 1-1/2" loose depth spread uniformly over acre.

The above rates are a guide. It will be at the discretion of the Engineer to determine what rate is sufficient for adequate protection of newly seeded areas.

The amount of mulch required shall be determined in the field.

SUMMARY OF PERMANENT SEEDING QUANTITIES		
RATE OF APPLICATION (Pure Live Seed per acre)	DESCRIPTION	QUANTITY
100 Lbs./Acre	K-31 Fescue Grass Seed	As Required
125 Lbs./Acre	Fertilizer(16-20-0)	As Required
	Mulching	As Required

INSTALL "BACK OF CURB PROTECTION"

NOTE: All areas disturbed by construction, excepting the paved areas, proposed added area and areas of undisturbed native sod or other desirable vegetation shall be fertilized (limed when required), seeded with K-31 Fescue, and mulched. Soil preparation shall conform to the Best Management Practices for Erosion and Sediment Control.

After the temporary seeding has been completed on the entire project, the permanent seeding shall be done during the normal seeding season.

It shall not be required to till the area to bare ground prior to permanent seeding. If temporary cover has provided stable slopes with no erosion, seed the permanent grasses into the existing cover. If there has been erosion that requires repair prior to seeding, then it may be necessary to regrade the area, resulting in bare ground.

FERTILIZER: A ratio and application rate that equals or exceeds the required minimum rate per acre listed in Summary of Seeding Quantities will be acceptable.


MULCHING: Mulch shall be spread uniformly over all disturbed areas and punched in the soil, unless otherwise noted on the plans. The rate of application per acre, thickness in place, for the various mulching materials are as follows:

Prairie Hay Mulching 1-3/4 to 2-1/4 Tons per Acre = 1-1/2" loose depth spread uniformly over acre.

The above rates are a guide. It will be at the discretion of the Engineer to determine what rate is sufficient for adequate protection of newly seeded areas.

The amount of mulch required shall be determined in the field.

SUMMARY OF PERMANENT SEEDING QUANTITIES		
RATE OF APPLICATION (Pure Live Seed per acre)	DESCRIPTION	QUANTITY
100 Lbs./Acre	K-31 Fescue Grass Seed	As Required
125 Lbs./Acre	Fertilizer(16-20-0)	As Required
	Mulching	As Required

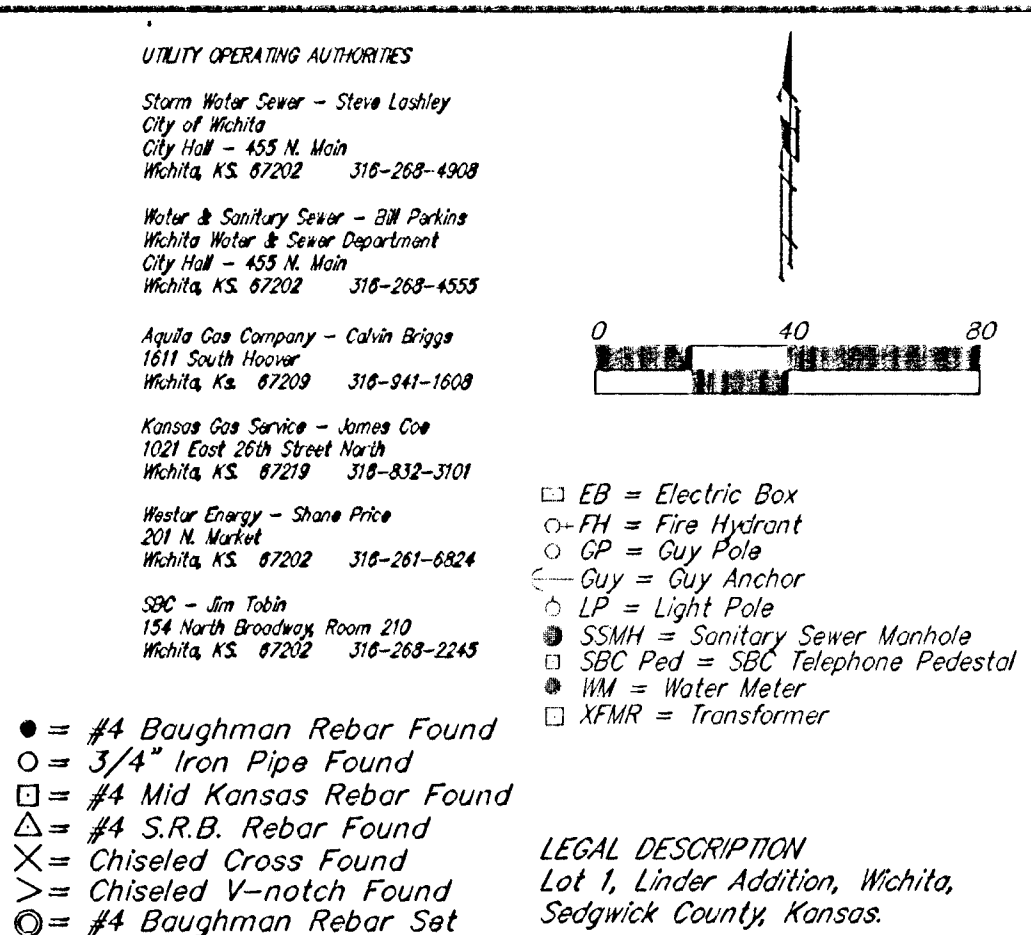

UTILITY OPERATING AUTHORITIES

Storm Water Sewer - Steve Losley
City of Wichita
City Hall - 455 N. Main
Wichita, KS 67202 316-269-4308

Water & Sewer Sewer - Bill Perkins
Wichita Water & Sewer Department
City Hall - 455 N. Main
Wichita, KS 67202 316-269-4355

Agua Gas Company - Calvin Briggs
1611 South Hoover
Wichita, KS 67209 316-941-1608

Kansas Gas Service - James Cox
1021 East 20th Street West
Wichita, KS 67219 316-832-3101

Water Energy - Shane Price
201 N. Market
Wichita, KS 67202 316-261-6824

SWC - Jim Felt
154 North Broadway, Room 210
Wichita, KS 67202 316-269-2245

Legend:

- EB = Electric Box
- FP = Fire Hydrant
- GP = Guy Pole
- GP = Guy Anchor
- LP = Light Pole
- SSWM = Sanitary Sewer Manhole
- SBC Ped = SBC Telephone Pedestal
- WM = Water Meter
- XMR = Transformer

LEGAL DESCRIPTION
Lot 1, Linder Addition, Wichita,
Sedgwick County, Kansas.

Area Inlet Protection
(See Permanent Seeding Notes for other areas)

Permanent Seeding, Fertilizing & Mulching
(See Permanent Seeding Notes for other areas)

Shaded Area is New Floodway Easement

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install Silt Fence "Slope Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)

Install "Back of Curb Protection" (See Notes & Details This Sheet.)