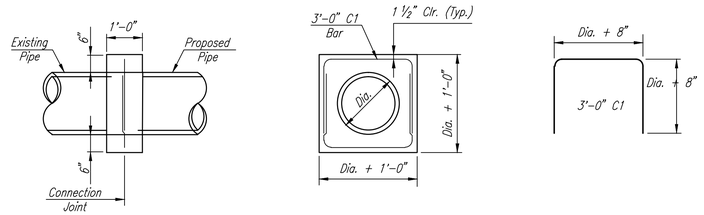

CONCRETE COLLAR DETAIL

Concrete collars shall be provided at connection to existing conduits where, in the opinion of the Engineer, a collar is required for a satisfactory connection. Class A Concrete or the mix used in concrete pavement shall be used throughout. Concrete collars will not be paid for directly, but shall be considered Subsidiary to the various pipes involved.

Saved 12-17-2013 2:37:30 PM by CP
Plot Scale 1:1 12-18-2013 9:08:20 AM by CP

PRINTS ISSUED

DATE	PURPOSE	NO.
04.29.13	FIELD CHECK	
05.31.13	OFFICE CHECK	
12.23.13	FOR CONSTRUCTION	

DOUGLAS AVE. BUS
FACILITY IMPROVEMENTS
(472-85080)
WICHITA, KS

LawKingdon Architecture
Engineering · Planning · Interiors · Landscapes

LawKingdon Architecture
345 RIVERVIEW, WICHITA, KS 67203
Phone (316) 268-0230 Fax: (316) 268-0205

©

CONTACT: Jeffery A. Best, ASLA

PROJECT NUMBER:
12856

SHEET TITLE:
MISCELLANEOUS DETAILS

SHEET NUMBER:
C20

PEC PROFESSIONAL ENGINEERING CONSULTANTS, P.A.
303 SOUTH TOPEKA WICHITA, KS 67202
316-262-2691 www.pec1.com