

FHWA REGION NO.	STATE	PROJECT NUMBER	FISCAL YEAR	SHEET NUMBER	TOTAL SHEETS
7	KANSAS	87N-0078-01	1997	15	33

BY	DATE
REFERENCES NOTED	
REFERENCES CHECKED	

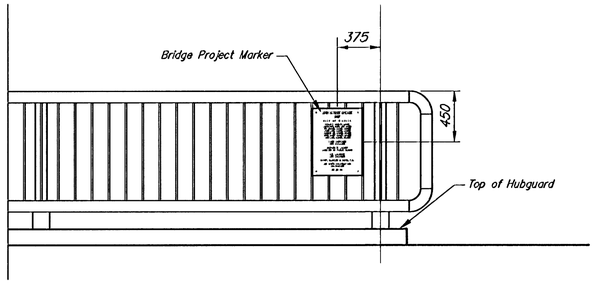

BRIDGE PROJECT MARKER LOCATION DETAIL

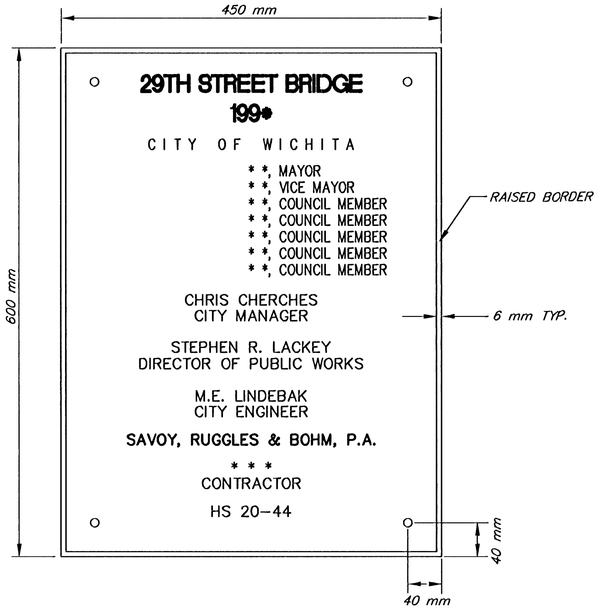

* YEAR BRIDGE COMPLETED

* * FIRST NAME, MIDDLE INITIAL, LAST NAME (BY CITY ENG. DEPT.)


* * * NAME OF CONTRACTOR

NOTES:

CONTRACTOR TO FURNISH A RUBBING OF THE BRIDGE PROJECT PLAQUE TO THE ENGINEER FOR APPROVAL PRIOR TO CASTING. PROJECT BRIDGE PLAQUE SHALL CONFORM TO APPLICABLE REQUIREMENTS OF SUB-SECTION 1625 OF THE KANSAS DEPT. OF TRANSPORTATION STANDARD SPECIFICATIONS.

PLAQUE TO BE MOUNTED ON THE TRAFFIC SIDE OF THE WEST END OF THE SOUTH HANDRAIL. PLAQUE SHALL BE MOUNTED TO STEEL PLATE AND WELDED TO 16□ x 870 BARS.

PLAQUE TO BE FURNISHED BY OTHERS. NON-PARTICIPATING.

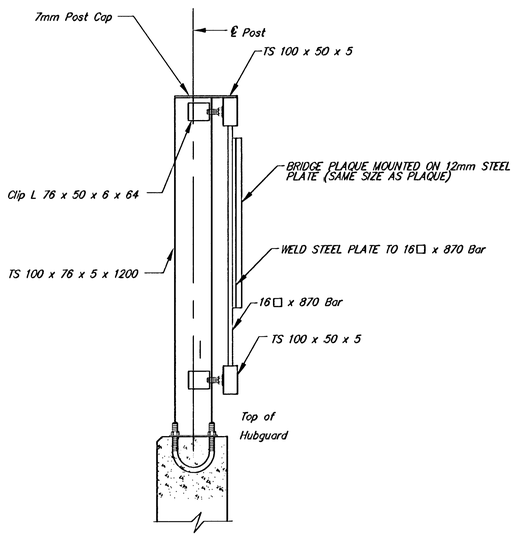

BRIDGE PROJECT MARKER MOUNTING DETAIL

Bridge Project Marker
29th STREET BRIDGE

SRB 924 NORTH MAIN WICHITA, KANSAS 67203 316-264-5008 FAX 264-4821
SAVOY, RUGGLES & BOHM, P.A.
ENGINEERING & SURVEYING

PROJECT NUMBER

DRAWN	DESIGN	REVIEW	DATE	UTILITY	SRB JOB
KWL	C.O.W.		Aug. 18, 1996		95E

REVISED

DWG. FILE: MISC\SIGNMARKER

15
33