Site Benchmark – 1
"X" chiseled on NW corner of catch basin located 21.6' W and 13.2' S of the southwest property corner.
Elevation = 1362.77 (NAVD 88)

Site Benchmark – 2
"X" chiseled on top of curb located 16.4' W and 39.3' S of the intersection of centerlines of Waterman Street and Zelta Street.
Elevation = 1370.35 (NAVD 88)

Site Benchmark – 3
"X" chiseled on top of curb located 43.7' E and 14.8' S of the intersection of centerlines of Zelta Street and Lewis Street.
Elevation = 1367.77 (NAVD 88)

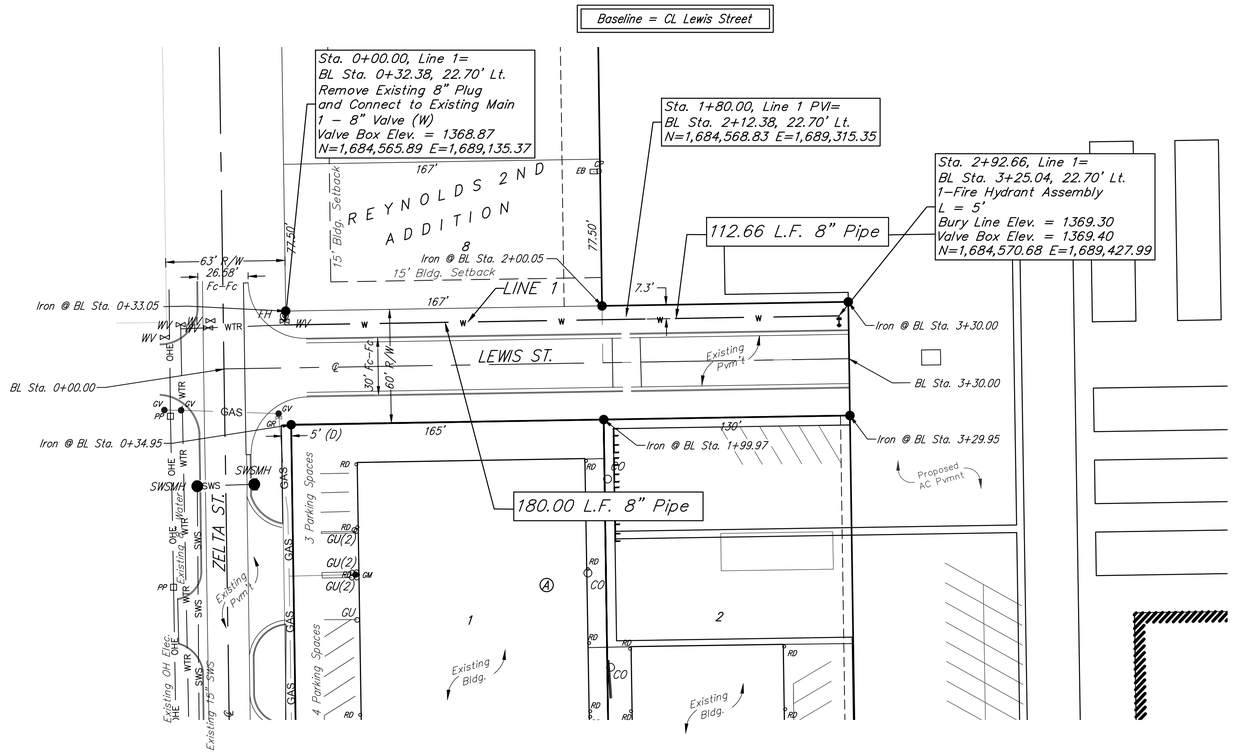

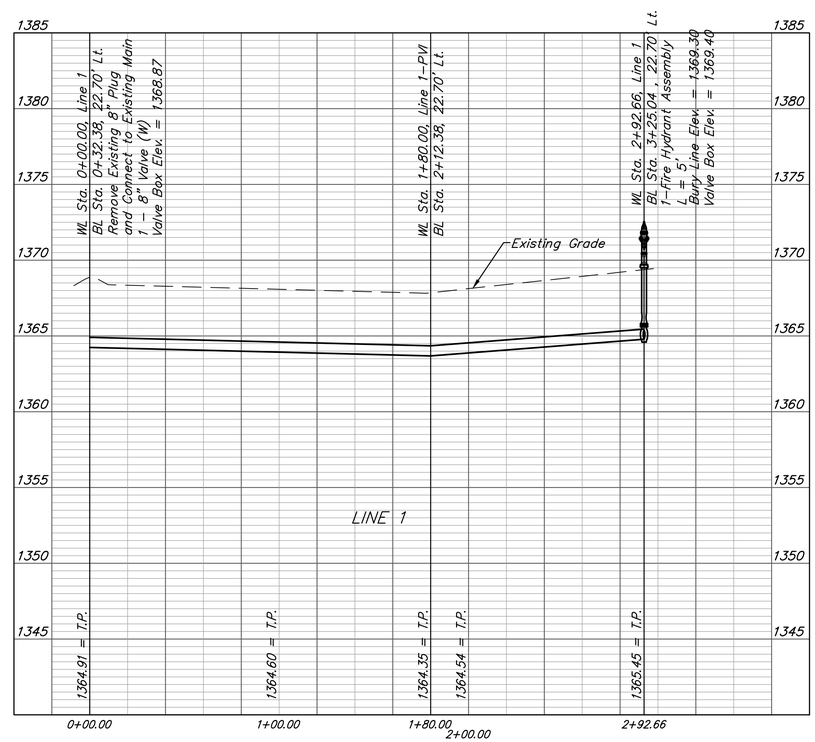

DEPTH UNKNOWN
Contractor to Verify Depth & Location of Existing Water Line Prior to Construction.

Baughman

Reynolds 2nd Addition - Phase I

LINE 1

Water Distribution System

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 448-220	DESIGN SRS / DRAWN SRS
REVISIONS:	APPROVED / DATE 09/08/20
	SCALE Noted
	SHEET 4 OF 12

SCOTT R. SERVIS
LICENSED
17874
10/28/20
KANSAS
PROFESSIONAL ENGINEER

E:\Projects\Site One - Kellogg & Zelta\Engineering\Phase 1\PPW\SO PPW_Recover.dwg