CONSTRUCTION PLANS FOR

PAWNEE PRAIRIE PARK PEDESTRIAN BRIDGES

PROJECT NO. 472-82534

CITY OF WICHITA, KANSAS

MICHAEL LINDEBAK, CITY ENGINEER

JANUARY 1995

INDEX NO. 785402

GENERAL NOTES:

1. Pawnee Prairie Park has been designated as a part of the Wichita Wild Habitat Area. This park contains naturally occuring plant and animal life and therefore all construction taking place within the park will be executed in a manner which will not disturb or destroy the habitat.

2. The Wichita Park Department will designate 12 foot wide travel ways to be used by the construction vehicles. Costs accociated with sidewalk damage in park directed pathways will be the responsibility of the City of Wichita Park Department. The Park Department will be responsible for erosion control and seeding of all areas disturbed by construction.

3. Clearing of trees or other habitat shall be completed by the City Park Department prior to construction activities by the contractor. The contractor shall not injure or destroy existing trees or shrubs without the proper authority of the City of Wichita. Cost for removal of stumps or rubble shall be subsidiary to construction items to be completed by the contractor.

4. Existing utilities and their locations, as shown on the plans, represent the best information obtainable for design. Location information has been obtained from the various uitilty companies and is either from company record drawings or company provided field locations. The plan locations shown are not guaranteed. Additional existing utilities not shown may also be encountered. The contractor will be required to work around existing utilities which do not conflict with proposed construction.

DESIGN DATA

Bridge Load: 85 PSF Uniform Live Load (AASHTO 3.14)

Soil Bearing: 2 ksf Presumptive Bearing Value.


BENCH MARKS:

BM#1 P.O.T. #5 1/2" ø Bar and Cap
Elev. 113.92

BM#2 P.O.T. #6 1/2" ø Bar and Cap
Sta. 11+56.60
Elev. 111.87

• BM#1 City of Wichita Disk. 38'S. and 24'E. of S. 1/4 Cor., Sec. 32, T27S, R1W 56.4' N.W. of Manhole. 116± N.E. of N.E. corner concrete manhole.
Elev. 113.69

• = (Low Water Crossing)

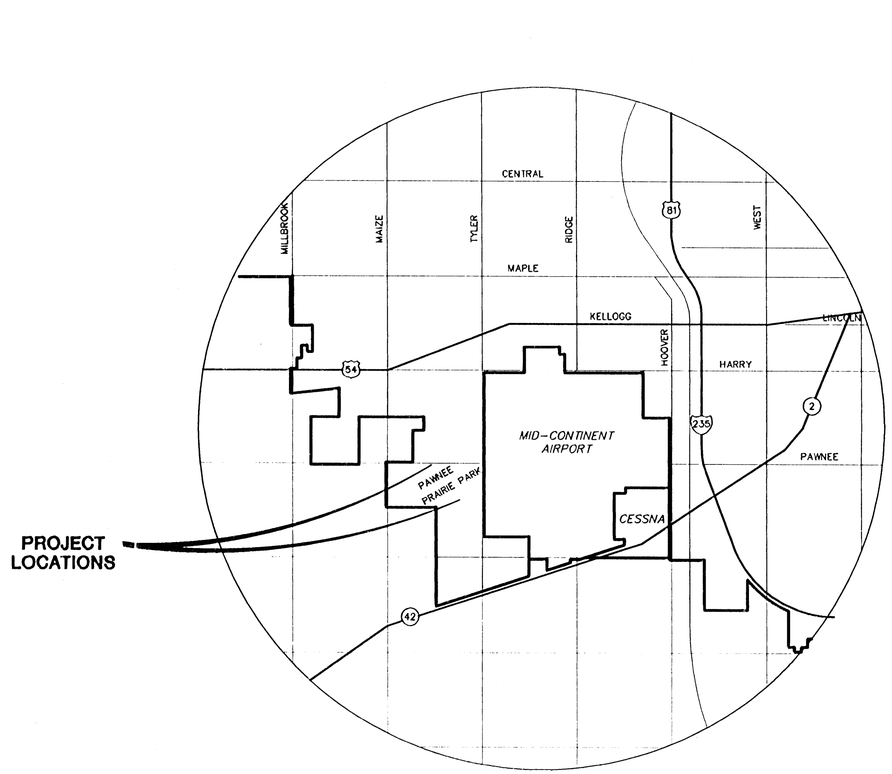

INDEX OF DRAWINGS

SHEET NO.	DESCRIPTION
1.	TITLE SHEET
2.	CONTOUR MAP
3.	CONSTRUCTION LAYOUT
4.	LOW WATER CROSSING

MID-KANSAS ENGINEERING CONSULTANTS, INC.
411 N. WEBB ROAD
WICHITA, KS. 67206
316-684-9600

PAWNEE PRAIRIE PARK
PROJECT NAME

TITLE SHEET
SHEET TITLE

KJS	KLH	KJS
DESIGN BY:	DRAWN BY:	CHECKED BY:
3-29-95	94148	1 of 4
DATE	JOB NO.	SHEET/NO.