PAVING KEYNOTES

1. CONSTRUCT CONCRETE PAVEMENT, SEE DETAILS SHEET CS501.
2. INSTALL STRIPING CROSS HATCH, SEE DETAIL SHEET CS501.
3. INSTALL 4" YELLOW PARKING STRIPE (TYP).
4. REMOVE AND RELOCATE EXISTING BOLLARDS IMPACTED BY PARKING LOT.
5. REMOVE AND REPLACE GRAVEL ADJACENT TO CONCRETE, SEE GRADING NOTES THIS SHEET.
6. INSTALL DROP DOWN BOLLARD, TO BE SUPPLIED BY THE CITY AND INSTALLED MY CONTRACTOR.
7. INSTALL ADA SYMBOL, SEE DETAILS SHEET CS501.
8. INSTALL CONCRETE WHEELSTOP (TYP.) SEE DETAILS SHEET CS501.
9. INSTALL ACCESSIBLE ADA PARKIGN SIGN, SEE DETAILS SHEET CS501.

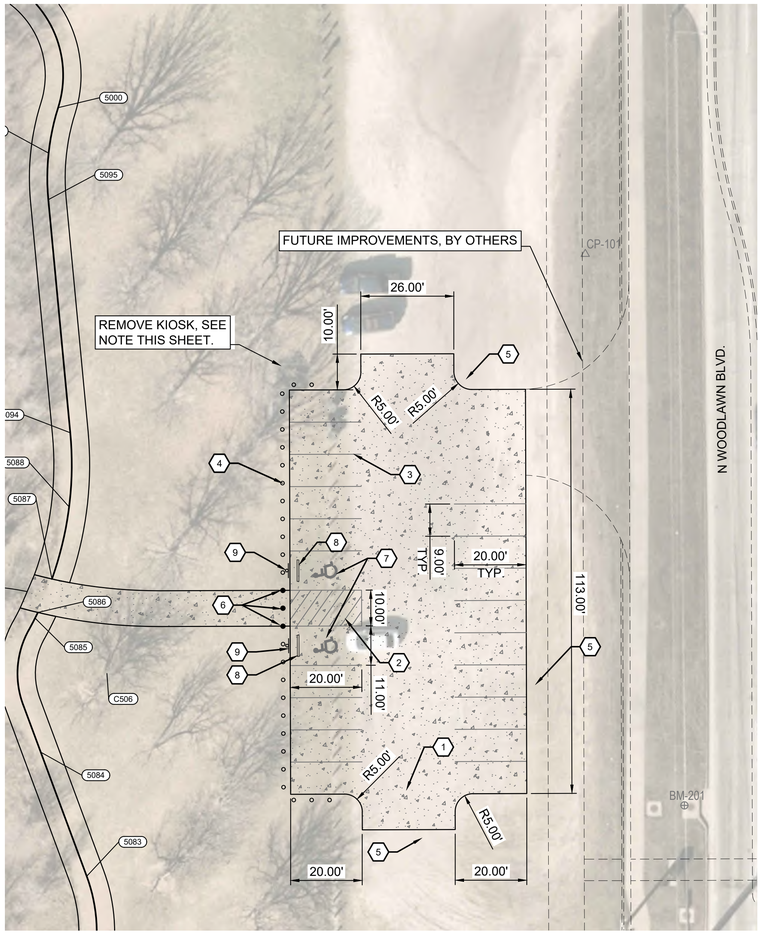

PARKING PAVING PLAN

PAVING LEGEND

- PROPOSED 6" CONCRETE PAVEMENT
- PROPOSED 4" SIDEWALK
- PROPOSED PEDESTRIAN BRIDGE
- WOOD BOLLARD RELOCATION
- PROPOSED REMOVABLE BOLLARD

KIOSK NOTES:

EXISTING KIOSK AND FOUNDATION TO BE REMOVED. ALL EXISTING SIGNS TO BE SALVAGED TO CITY OF WICHITA PARKS & RECREATION DEPARTMENT

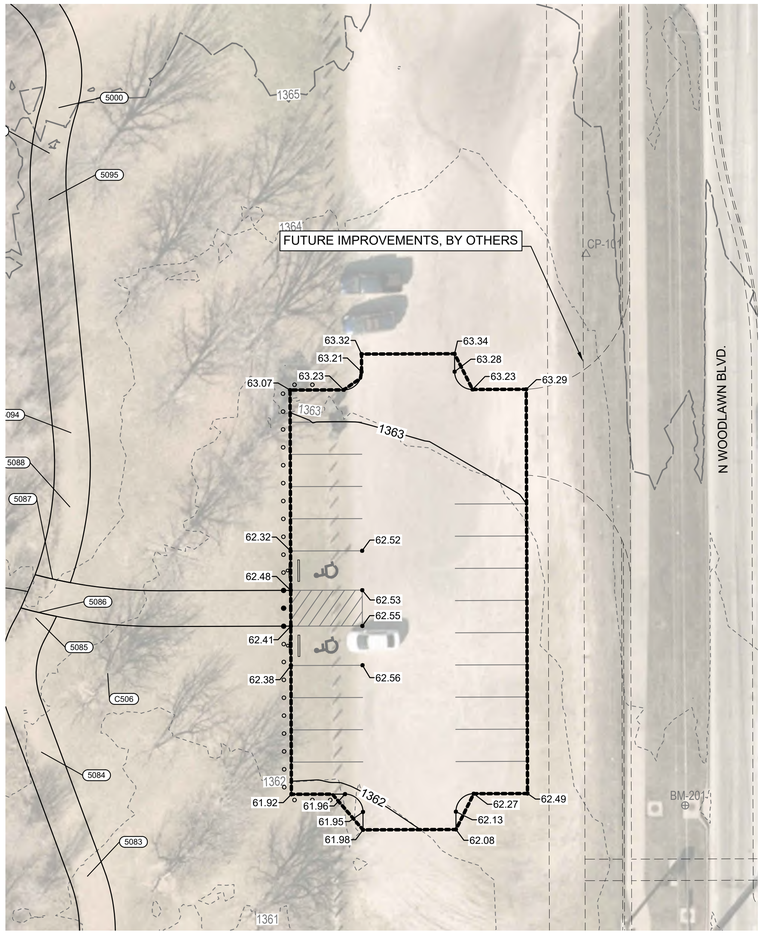

PARKING GRADING PLAN

0 10' 20' 40'

GRADING LEGEND

- 1300 — EXISTING MAJOR CONTOUR
- 1301 — EXISTING MINOR CONTOUR
- 1300 — PROPOSED MAJOR CONTOUR
- 1301 — PROPOSED MINOR CONTOUR
- PROPOSED GRADING LIMITS
- 01.50 — PROPOSED SPOT ELEVATION (+ 1300 = NAVD88 ELEVATION)

GRADING ABBREVIATIONS

ME	MATCH EXISTING

PARKING NOTES:

1. CONTRACTOR SHALL REMOVE EXISTING GRAVEL AS NEEDED FOR CONSTRUCTION OF PARKING LOT. SALVAGE ONSITE AT OWNERS DIRECTION.
2. CONTRACTOR SHALL REMOVE AND REPLACE GRAVEL ADJACENT TO PROPOSED CONCRETE PARKING LOT FOR SMOOTH TRANSITION.

PEC
PROFESSIONAL ENGINEERING CONSULTANTS
303 SOUTH TOPEKA
WICHITA, KS 67202
316-262-2691 www.pec1.com

CITY OF WICHITA

JOSHUA GOLIK LICENSED 24136 01/31/2025 KANSAS PROFESSIONAL ENGINEER

CHISHOLM CREEK PARK NORTH IMPROVEMENTS

N WOODLAWN BLVD, WICHITA, KS 67220

Issue:		
1	ISSUED FOR BID	01/24/25

JOB NO.	247042-001
DATE	24 JANUARY 2025
PM	JAG
DESIGNED BY	JAG
DRAWN BY	BAB
CHECKED BY	DRC

PARKING LOT PLAN

CS107

SAVED 1/31/2025 10:35:59 AM BY BENJAMIN.BOCKOVER
PLOTTED 1/31/2025 10:37:09 AM BY BENJAMIN.BOCKOVER
U:\WICHITA-CIVIL\2024\247042\0012PD4_PLANS\Q30\247042-001-CS107.DWG