PROPOSED SANITARY SEWER RELOCATION
WEST BANK 1ST ADDITION

WICHITA, SEDGWICK COUNTY, KANSAS

MAPLE ST

SYCAMORE ST

McCLEAN BLVD

ARKANSAS RIVER

LOT 1

LOT 2

ACCESS CONTROL EXCEPT 2 OPENINGS

35' BUILDING SETBACK LINE

PROPOSED 18" @ 0.11%

U. S. 54 HIGHWAY

CONDEMNATION CASE A-60844

COMPLETE ACCESS CONTROL

From I.D. Stadium

GRAPHIC SCALE

40 0 20 40 80 160

(IN FEET)
1 inch = 40 ft.

ELEVATION = CITY DATUM

BENCH MARK:
Brass rod in concrete post
@ S.W. Corner Maple & Sycamore
Elev. 1110.73 City Datum

PROJECT SITE

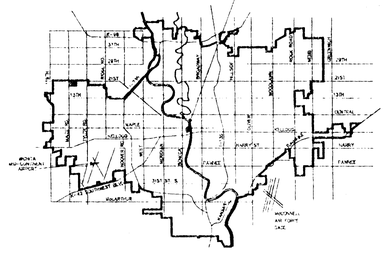

VICINITY MAP

PROPOSED NEW SEWER

SEWER TO REMAIN

SEWER TO BE ABANDONED

MH ~~SEWER~~ TO BE ABANDONED OR REMOVED

PROJECT NO. 94L00238E
(T.REX)238E\DRNG

SRB 324 NORTH MAIN 316-264-8008
WICHITA, KANSAS 67202 FAX 264-4621
SAVOY, RUGGLES & BOHM, P. A.
ENGINEERING & SURVEYING

Feb. 9, 1995