
B.M. 129.05 "M" in Mueller, Fire Hydrant, S.W. cor. 16½ ℄ McComas

B.M. 131.69 "+" on S. Curb 17½', 17' E. of E. ℄ McComas.

Scale 1"=80'

Baseline - E. ℄ McComas

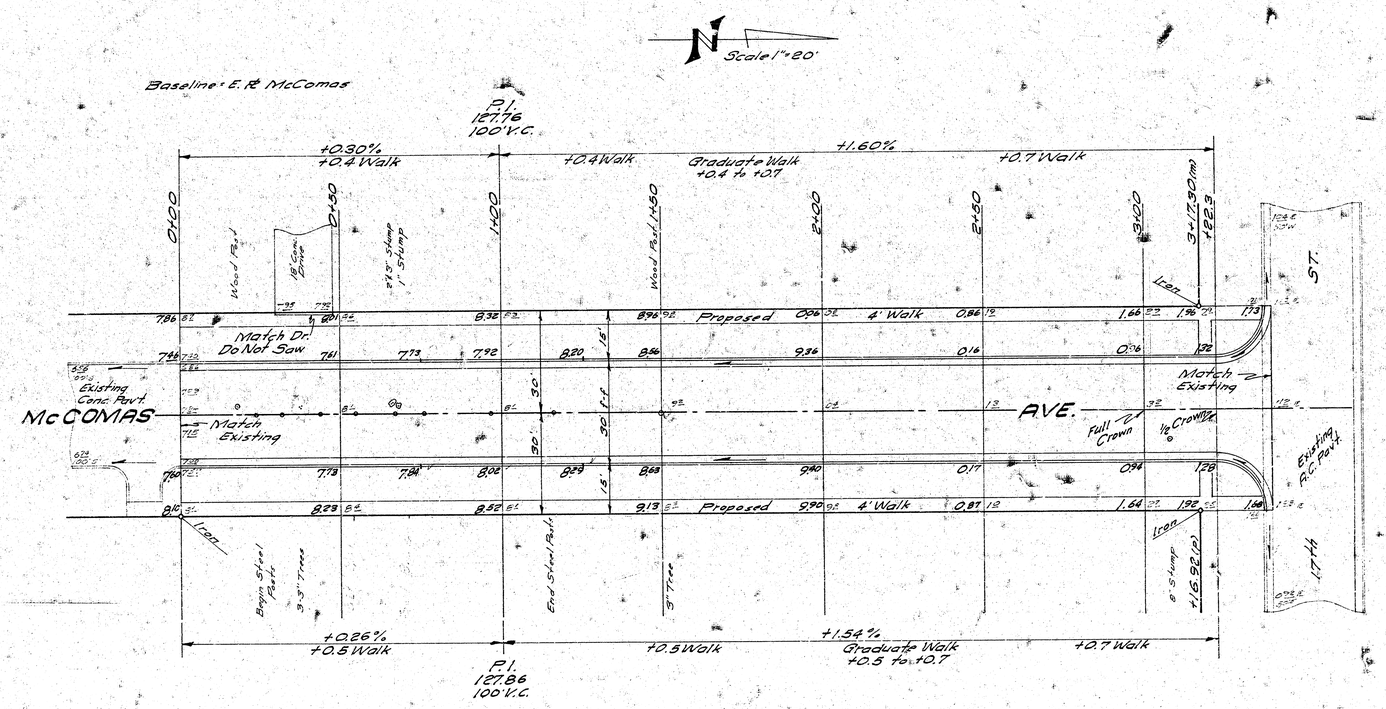

Note: Contractor to Grade and Clear Parking for Proposed Sidewalk. Compact Fill in Sidewalk Area. Sidewalk to be Constructed by "OTHERS".

Removal of stumps at Sta. 0+68 incidental to project.

B. E. SMITH 436 KANSAS PROFESSIONAL ENGINEER

R. W. LINN LICENSED 3634 KANSAS PROFESSIONAL ENGINEER

* EARTHWORK QUANTITIES *

	Property Excavation	Property C. Fill	City Excavation
	888.9 C.Y.	3.3 C.Y.	48.9 C.Y.
+10%	88.9 "	.3 "	4.9 "
	977.8 C.Y.	3.6 C.Y.	53.8 C.Y.

1/2

McCOMAS AVE.

From N.L. Floyd Moore Addition
To S.L. 17th Street
26'-2'-30' B Curb
B.E. SMITH CITY ENGINEER
CITY OF WICHITA, KANSAS
DATE APRIL 1968 C-17-96