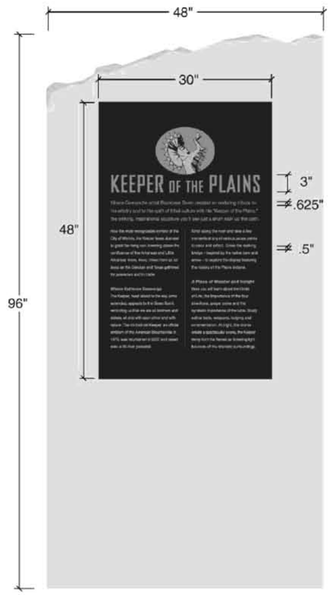

KEEPER | 1 Sided | 1 Location

- .25" aluminum panel, prime, paint Dupont D8116 Bronze, vinyl text and graphics in two colors, clearcoat
- Sign vendor to install the aluminum panel to the General-Contractor-supplied limestone using concrete adhesive and tap and drill method.

D INTERPRETIVE SIGNAGE-Y4
NTS

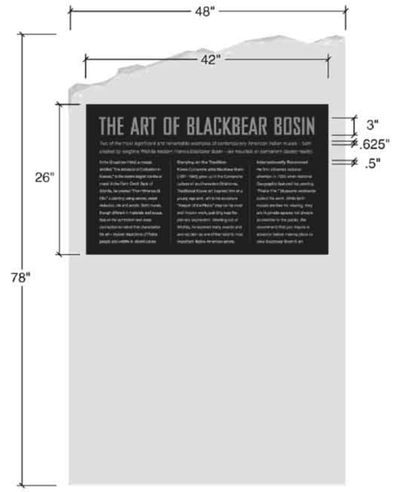

BOSIN | 1 Sided | 1 Location

- .25" aluminum panel, prime, paint Dupont D8116 Bronze, vinyl text and graphics in two colors, clearcoat
- Sign vendor to install the aluminum panel to the General-Contractor-supplied limestone using concrete adhesive and tap and drill method.

E INTERPRETIVE SIGNAGE-Y5
NTS

West face

e1 BLACKBEAR BOSIN PANEL
NTS

Keeper Interpretive

West face

d1 KEEPER OF THE PLAINS PANEL
NTS

GRETEMAN GROUP

PRINTS ISSUED

DATE	PURPOSE	NO.
10.05.09	FIELD CHECK	
11.12.09	OFFICE CHECK	
02.01.10	FINAL PLANS	

RIVER CORRIDOR
IMPROVEMNTS PHASE 1C:
WICHITA, KS

LawKingdon Architecture
Engineering · Planning · Interiors · Landscapes

LawKingdon Architecture
345 RIVERVIEW,WICHITA,KS 67203
Phone (316) 268-0230 Fax: (316) 268-0205
©

CONTACT: JEFFREY A. BEST, ASLA

PROJECT NUMBER:
08386

SHEET TITLE:
WAYFINDING SIGNAGE

SHEET NUMBER:
WY1.2