BENCHMARKS:
BM #1: "□" Cut on top of curb, east side of Ridgehurst, adjacent to common front lot corner of Lots 6 & 7, Block E, Stonebridge 2nd Addition.
ELEV. = 1348.51 NGVD29

BM #2: "□" Cut on top of curb, south side of Sundance, near end of pavement in front of Lot 6, Block 3, Savannah at Castle Rock Ranch 7th Addition.
ELEV. = 1347.33 NGVD29

BM #3: "□" Cut on top of hubguard at NE corner of RCBC 350' west of the east property line of Stonebridge 2nd Addition.
ELEV. = 1333.58 NGVD29

Scale: 1" = 20'
• = Iron

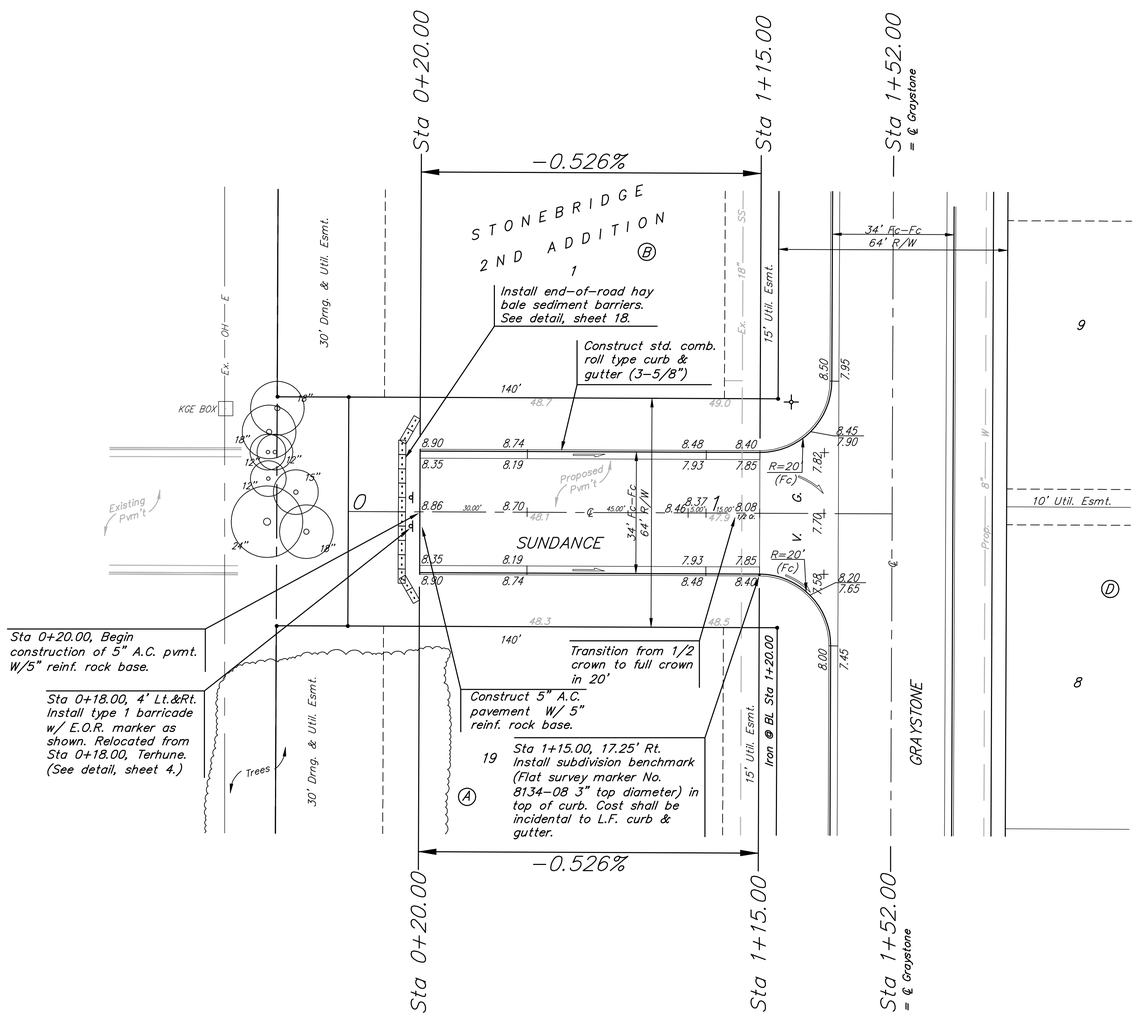

WATER VALVE LOCATION TABLE

VALVE NUMBER	STREET	BASELINE STATION	OFFSET DISTANCE	OFFSET DIRECTION
V1	Terhune	0+16.00	26'	Lt.
V2	Terhune	2+01.00	26'	Lt.
V3	Terhune	2+64.00	26'	Lt.
V4	Sundance	5+64.73	26'	Lt.
V5	Sundance	10+08.16	26'	Lt.
V6	Ridgehurst	0+00	26'	Lt.
V7	Terhune	1+58.59	26'	Lt.
V8	Terhune	2+28.59	26'	Lt.
V9	Graystone	0+00	26'	Rt.
V10	Graystone	6+56.00	26'	Rt.
V11	Graystone	7+19.00	26'	Rt.

Paving contractor will be responsible to operate all water valves on the project, in the presence of the inspector, to ensure accessibility to the valves, and that all valves are left in the "ON" position when the project is completed.

Baughman

Stonebridge 2nd PH. II & 3rd Addition
SUNDANCE
STA 0+00 TO STA 1+52.00

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316262-7271 F 3162620149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER	DESIGN	DRAWN
472-84592	TJW	TMS
REVISIONS:	APPROVED NBW	DATE 07/11
	SCALE Noted	
	SHEET 14 OF 28	

06-14 Str1.dwg 06-08-E635