FHWA REQ. NO.	STATE	PROJECT NO.:	YEAR	SHEET NUMBER	TOTAL SHEETS
7	KANSAS	US 54/US 400 87 U-2031-01	2006	1	3

INDEX OF SHEETS

SHEET NO.: 1 TITLE SHEET
2 TYPICAL SECTIONS AND GENERAL NOTES
3 TRAFFIC SIGN DETAILS

STATE OF KANSAS


DEPARTMENT OF TRANSPORTATION

KLINK 1R RESURFACING FY 2006

US-54/US400 (KELLOGG) 87 U-2031-01 FROM 119TH ST. W. TO 111TH ST. W

CITY OF WICHITA, SEDGWICK COUNTY, KANSAS
POPULATION = 304,011

CONCRETE PAVEMENT REPAIR
ASPHALT SHOULDER REPAIR
DIAMOND GRINDING

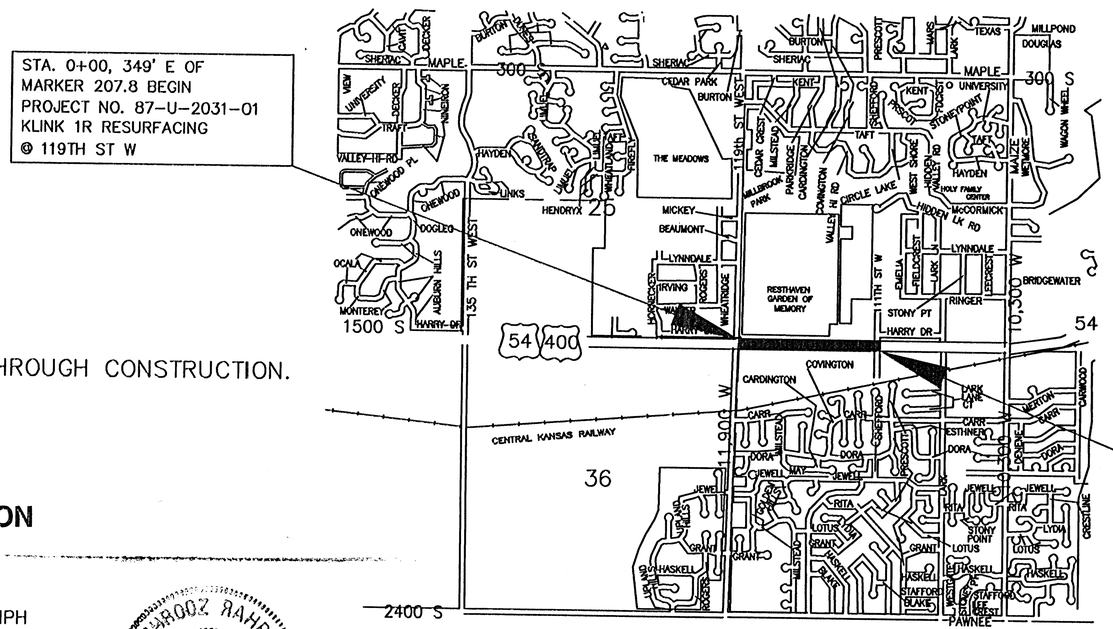

NOTE: TRAFFIC TO BE CARRIED THROUGH CONSTRUCTION.

DESIGN DESIGNATION

KELLOGG (US 54/400)

AADT (2002) = 25,725
Posted Speed Limit = 50 MPH

BEHROOZ RAHBAR License #9778 PROFESSIONAL ENGINEER 7/20/05

ESTIMATE OF QUANTITES

ITEM	DESCRIPTION	QUANTITY	UNIT
1*	REINF. CONC. PAVEMENT REPAIR (10")	875	SY.
2*	ASPHALT SHOULDER REPAIR (6")	2726	SY.
3*	DIAMOND GRINDING	6,430	SY.
4*	6" YELLOW THERMOPLASTIC PVMT MKGS	1800	LF.
5*	6" WHITE THERMOPLASTIC PVMT MKGS	2250	LF.
6*	TRAFFIC CONTROL	1	LS.

* PARTICIPATING ITEMS

GROSS LENGTH OF PROJECT	1953 FT.
EXCEPTIONS	0.00
ADDITIONS	0.00
NET LENGTH OF PROJECT	1953 FT.
NET LENGTH OF BRIDGES	0.00 FT.
NET LENGTH OF ROAD	1953 FT.

APPROVED-DATE

JAMES ARMOUR, P.E.
CITY ENGINEER
CITY OF WICHITA, SEDGWICK COUNTY, KANSAS

THE CITY OF WICHITA
CITY ENGINEER'S OFFICE
CITY HALL - SEVENTH FLOOR
455 NORTH MAIN STREET
WICHITA, KANSAS 67202
(316) 268-4501
(316) 268-4114 FAX

KELLOGG (U.S. 54/400) FROM 119TH ST. W. TO 111TH ST. W.

JAMES L. ARMOUR P.E. - CITY ENGINEER

ENGINEER:	DRAWN BY:
B. RAHBAR	J. LONG
PROJECT NUMBER: 472-84140	INDEX CODE: 132718
DATE: MAR. 2005	SHEET 1 OF 3