Survey C.H. Mills No. 111
Calc. S.G. Saal 9-27-61
Ex.
Checked

Scale 1" = 20'

B.M. 112.74 N.E. Cor. Conc. Porch, N end Hse. S.E. Cor. University & Richmond.
B.M. 110.53 "a" on N.Cb. Richmond, 3' north of N.L. University.
BASE LINE = ℄ of Richmond Avenue.

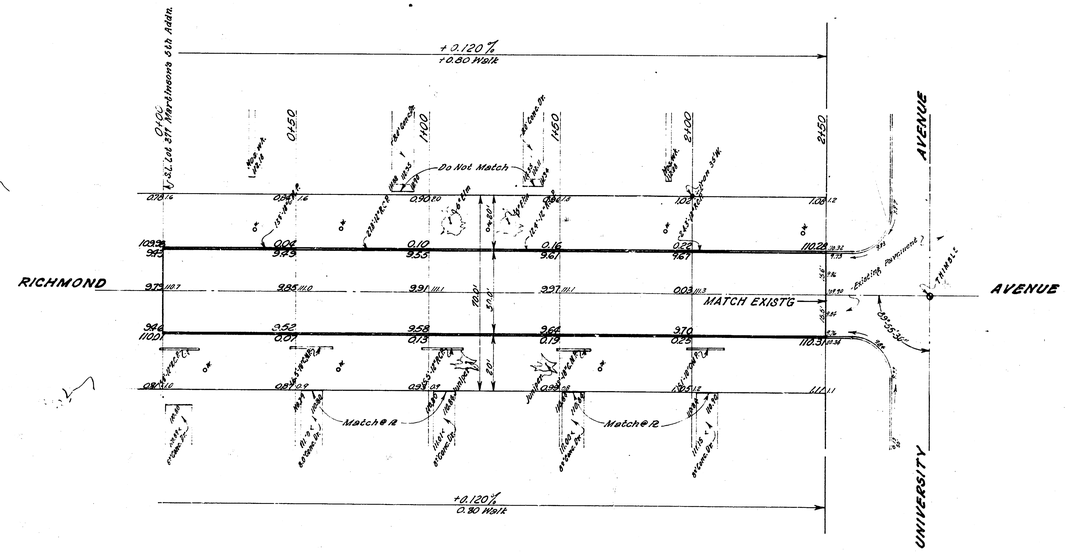

EXCAVATION
457.1
46.7 10%
502.8 C.Y.

FILL
30.6
-3 10%
3.3 C.Y.

Name of Project- RICHMOND AVENUE	
Limits of Project- S.L. Lot 371 Martinson 6th Addn.-S.L. University	
Type of Construction- 30' Concrete & Curb	
Department of Public Works-Engineering Division CITY OF WICHITA, KANSAS	
E.E. Smith	City Engineer
Date- Oct. 1961	Proj. No. C11-30