B.M. 118.80 N.E. Cor. Conc. Porch, House #1703 N. Pennsylvania
B.M. 117.25 St'd. N.E. Cor. 17TH & Hydraulic
B.M. 117.05 "G" in Globe 0.5' E. of E. End Radius, N. Curb on N.E. Cor. 16TH & Hydraulic.

Survey Notes By J.R.M.
Plan Notes & Quantities
Estimate
Checked

EXCAVATION

CITY	17.7	PROP.	458.5
PLUS 10%	1.8	PLUS 10%	45.9
TOT. CITY	19.5 C.Y.	TOT. PROP.	504.4 C.Y.

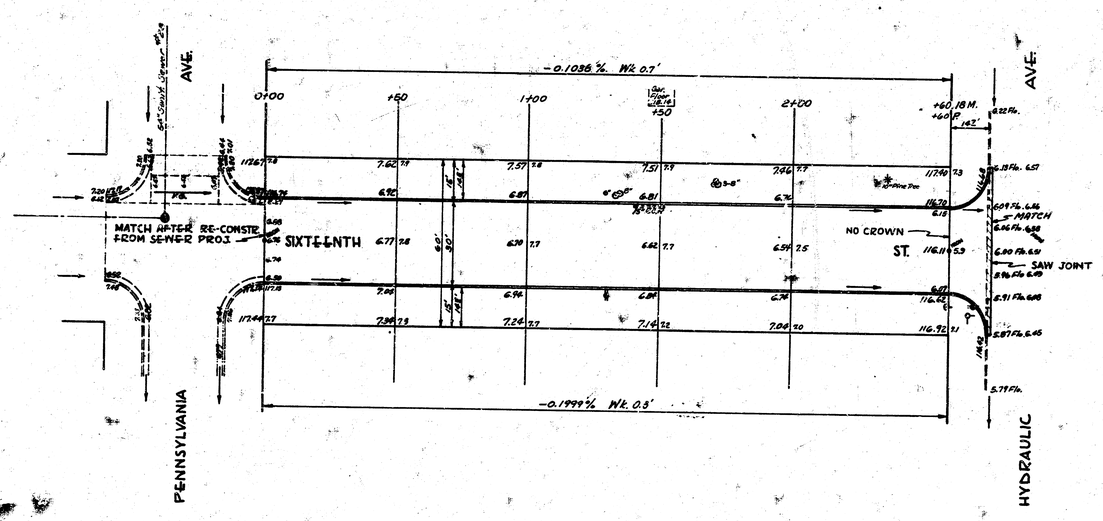



1/2

SIXTEENTH ST.
PENNSYLVANIA TO HYDRAULIC
30' CONC. & CURB
CITY OF WICHITA, KANSAS.
B.E. SMITH CITY ENGINEER
Oct. 1952 PROJ. NO. 15-280