LEVEE C

LEVEE D

LEVEE D

LEVEE C

S 31st ST E

S BLUFF ST

E 83rd ST S

LEVEE C

ADD ALTERNATE #14
REMOVE ALL TREES AND BRUSH THAT HAVE GROWN UP IN THE A-JAX JETTIES. REMOVAL SHALL BE FROM THE LEVEE TOE TO A POINT 50' FROM THE LEVEE TOE AND SHALL BE THE WIDTH OF THE JETTY PLUS 20' ON BOTH SIDES OF THE JETTY. SEE INSET DETAIL, THIS SHEET.

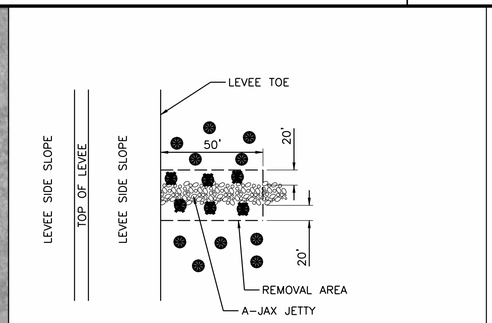

INSET DETAIL



NOTES:

1. TREES TO BE REMOVED THAT ARE GREATER THAN 15' FROM THE TOE OF THE LEVEE MAY BE CUT FLUSH WITH GROUND SURFACE AND TREATED TO PREVENT FUTURE GROWTH. SEE SHEETS G-1.02 AND G-1.03.

MARK	DESCRIPTION	DATE	APPR.

amec
AMEC Earth & Environmental, Inc.
1129 SW Wanamaker
Topeka, Kansas 66604
Phone: (785) 272-4630
Fax: (785) 272-4676

CITY OF WICHITA

SYSTEMWIDE VEGETATION MAINTENANCE - PHASE 3
WICHITA-VALLEY CENTER LOCAL FLOOD PROTECTION PROJECT
WICHITA, KANSAS

PREPARED FOR
THE CITY OF WICHITA, KANSAS
455 N. Main
Wichita, KS 67202

LAWRENCE J. SAMPLE
LICENSED
15855
5-20-2011
KANSAS
PROFESSIONAL ENGINEER

DESIGNED BY: Larry Sample, PE		DATE: 5-20-2011
DWN BY: REB	CKD BY: LBK	APP BY: L. SAMPLE

FILE NAME: 38_TREE REMOVAL PLAN - ALTERNATE BID ITEM.dgn

AMEC PROJ. NO. 5-6150-0001

TREE REMOVAL PLAN - ALTERNATE BID ITEM

LM-6.16

SHEET 38 OF 42